

EXPRESS MAIL LABEL NO. EL108261870US

Attorney Docket
No. 8616.CIP3.CON

LAW OFFICES
THORPE, NORTH & WESTERN
A LIMITED LIABILITY PARTNERSHIP

SALT LAKE AREA OFFICE

U.S. MAIL ADDRESS:
P.O. BOX 1219
SANDY, UTAH 84091-1219

STREET ADDRESS:
8180 SOUTH 700 EAST, SUITE 200
SANDY, UTAH 84070

TELEPHONE (801) 566-6633
FACSIMILE (801) 566-0750
GENERAL E-MAIL: PATLAW@TNW.COM
HOME PAGE: <http://www.tnw.com>

JOSEPH VIN E THORPE
VAUGHN W NORTH
WAYNE WESTERN
ANTHONY R CLAYTON
ALAN J HOWARTH, Ph.D.
KIM R CANNON
RANDALL B BATEMAN
DAVID W O'BRYANT
FRANK W COMPAGNI
GARROD M HOBSON
Registered Patent Attorneys

KENNETH H TARBET, Ph.D.
PETER M DE JONGE
Attorneys at Law

WEILI CHENG, Ph.D.
DAVID McKINNEY
Technical Consultants

* A Professional Corporation

INTELLECTUAL PROPERTY LAW
PATENTS, TRADEMARKS,
COPYRIGHTS, UNFAIR
COMPETITION AND
RELATED MATTERS

State Bar Admissions Incumbent
Utah, California, Idaho,
New Jersey and Texas

LOGAN OFFICE
1770 N. RESEARCH PARK WAY, #114
NORTH LOGAN, UTAH 84241
TELEPHONE (435) 750-0146

LAS VEGAS OFFICE
Of Counsel: Neil J. Beller*
2345 REDROCK STREET, SUITE 310
LAS VEGAS, NEVADA 89102
TELEPHONE (702) 368-7767

*Admitted in Nevada

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is
a patent application comprising:

Sixty-two (62) pages of specification, claims and abstract.

Thirteen (13) sheets of X formal/____ informal
drawings.

X Declaration, Power of Attorney and Petition.
____ Newly Executed
X Copy from prior application (when a
continuation or divisional) (37 C.F.R. §
1.63(d))

CERTIFICATE OF MAILING BY EXPRESS MAIL

Mailed: August 11th, 1998

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee"
service on the date indicated above in an envelope addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

Respectfully submitted,

Grant R. Clayton
Attorney for Applicant

X Incorporation by Reference (if a copy of the declaration from prior application is included). The entire disclosure of the prior application, from which a copy of the declaration is supplied herewith as referenced above, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

 Microfiche Computer Program (Appendix)

 Nucleotide and/or Amino Acid Sequence Submission
 Computer Readable Copy
 Paper Copy (identical to computer readable copy)
 Statement verifying identity of above referenced copies

 X This application is a Continuing application and a
 X Continuation of prior application no. 08/537,612
 Divisional of prior application no.
 Continuation-in-part of prior application no.

Also enclosed are:

 An Assignment from
to (including assignment cover sheet)

 Information Disclosure Statement (IDS) including PTO-1449 Copies of () references

 X Preliminary Amendment

 X Return Receipt Postcard (MPEP 503) Should be specially itemized

 Declaration Claiming Small Entity Status for

X

A Declaration Claiming Small Entity Status was filed in the prior application and such status is still proper and desired

Certified copy of priority document(s) (if foreign priority is claimed)

A copy of the extension of time simultaneously filed in the prior application

FEES

No fees are enclosed.

X

Check No. 4257 in the amount of \$636.00 which represents the filing fee for this application.

The fees have been calculated as set forth below.

PATENT APPLICATION FEE CALCULATION TABLE							
			SMALL ENTITY			LARGE ENTITY	
	NO. FILED	NO. EXTRA	RATE	FEE	OR	RATE	FEE
BASIC FEE				\$ 395	OR		\$ 0
TOTAL CLAIMS	<u>27</u> - 20 =	7	X 11 =	\$ 77	OR	X 22 =	\$
IND. CLAIMS	<u>7</u> - 03 =	4	X 41 =	\$ 164	OR	X 82 =	\$
Presentation of Multiple Dependent Claim			135 =	\$ 0	OR	270 =	
ASSIGNMENT FILING FEE (____)			X 40 =	\$ 0	OR	X 40 =	\$
			TOTAL:	\$ 636	OR	TOTAL:	\$ 0

The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or to credit any overpayment to Deposit Account No. 20-0100. An original and one copy of this letter are enclosed.

X

Any and all filing fees required under 37 C.F.R. § 1.16.

X

Any patent application processing fees under 37 C.F.R. § 1.17.

The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 20-0100.

 X Any patent application processing fees under 37 C.F.R. § 1.17.

 The issue fee set in 37 C.F.R. § 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

 X Any filing fees under 37 C.F.R. § 1.16 for presentation of extra claims.

CORRESPONDENCE ADDRESS

 X Please direct all future correspondence to:

Customer No. 20451


 X Please direct all future telecommunications to:

Grant R. Clayton
THORPE, NORTH & WESTERN, L.L.P.
Telephone: 801/566-6633
Facsimile: 801/566-0750

 X Please refer to the following attorney docket number in all future correspondence and telecommunications:

Attorney Docket No. 8616.CIP3.CON

DATED this 11th day of August, 1998.

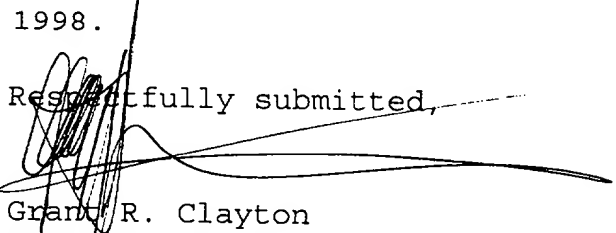Respectfully submitted,

Grant R. Clayton
Registration No. 32,462

THORPE, NORTH & WESTERN, L.L.P.
P. O. Box 1219
Sandy, Utah 84091-1219
Telephone: (801) 566-6633
Facsimile: (801) 566-0750

EXPRESS MAIL LABEL NO. EL108261870US

PATENT APPLICATION
Docket No. 8616.CIP3CON

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of Carl T. Wittwer, et al.)
Serial No.: _____) Art Unit
Filed: August 11, 1998)
Continuation Application of:)
Serial No.: 08/537,612) Art Unit
Filed: October 2, 1995) 1743
For: METHOD FOR RAPID THERMAL)
CYCLING OF BIOLOGICAL)
SAMPLES)
Examiner: J. M. Ludlow)

PRELIMINARY AMENDMENT

Honorable Commissioner of Patents
and Trademarks
Washington, D. C. 20231

Sir:

Prior to calculation of the filing fee and examination of this application, please enter this amendment.

IN THE SPECIFICATION:

Please amend the Specification at page 2, lines 5-8 as follows:

--This application is a continuation of U.S. patent application serial no. 08/537,612 filed October 2, 1995 entitled Method For Rapid Thermal Cycling of Biological Samples which is a continuation-in-part of U.S. patent application serial no. 08/179,969 filed January 10, 1994 entitled Rapid Thermal Cycling Device, now U.S. Patent No. 5,455,175 issued on October 3, 1995[.] which is a continuation-in-part of U.S. patent application serial no. 07/815,966 filed January 2, 1992 entitled Rapid Thermal Cycling Device, now abandoned, which is a continuation-in-part of U.S. patent application serial no. 07/534,029 filed June 4, 1990 entitled Automated Polymerase Chain Reaction Device, now abandoned.--

IN THE CLAIMS:

Please cancel claims 1-29, without prejudice.

Please add new claims 30-56, as indicated below.

20 30. An improved method of amplifying a nucleic acid sequence by thermal cycling of the nucleic acid sequence in the presence of a thermostable DNA polymerase, said method comprising the steps of:

--This application is a continuation of U.S. patent application serial no. 08/537,612 filed October 2, 1995 entitled Method For Rapid Thermal Cycling of Biological Samples which is a continuation-in-part of U.S. patent application serial no. 08/179,969 filed January 10, 1994 entitled Rapid Thermal Cycling Device, now U.S. Patent No. 5,455,175 issued on October 3, 1995[.] which is a continuation-in-part of U.S. patent application serial no. 07/815,966 filed January 2, 1992 entitled Rapid Thermal Cycling Device, now abandoned, which is a continuation-in-part of U.S. patent application serial no. 07/534,029 filed June 4, 1990 entitled Automated Polymerase Chain Reaction Device, now abandoned.--

IN THE CLAIMS:

Please cancel claims 1-29, without prejudice.

Please add new claims 30-56, as indicated below.

30. An improved method of amplifying a nucleic acid sequence by thermal cycling of the nucleic acid sequence in the presence of a thermostable DNA polymerase, said method comprising the steps of:

(a) placing a biological sample comprising said nucleic acid sequence in a capillary vessel;

(b) raising the temperature of the biological sample from a first temperature to a second temperature wherein the second temperature is at least 15°C higher than the first temperature;

(c) holding the biological sample at the second temperature for a predetermined amount of time;

(d) lowering the temperature of the biological sample from the second temperature to at least the first temperature;

(e) holding the biological sample at a temperature at least as low as the first temperature for a pre-determined length of time;

(f) raising the temperature of the biological sample to the second temperature; and

(g) repeating steps c through f, wherein those steps are completed in approximately 60 seconds or less.

31. The improved method of claim 30 wherein the capillary vessel defines a volume ranging from about 10 microliters to about 100 microliters.

32. The improved method of claim 30 wherein the pre-determined length of time for holding step (c) is less than one second.

5 33. The improved method of claim 30 wherein step (d) comprises lowering the temperature of the biological sample to a third temperature that is below the first temperature, step (e) comprises holding the biological sample at the third temperature for a pre-determined length of time, said method further comprising
10 the step of raising the temperature of the biological sample back to the first temperature and holding the sample at the first temperature for a pre-determined length of time before proceeding to step (f).

15 34. The improved method of claim 33 wherein the pre-determined length of time for holding step (e) is less than one second.

35. An improved method of modifying a biological sample by
20 subjecting the biological sample to multiple cycles of controlled rapid heating and cooling, said method comprising the steps of placing the sample in a capillary vessel and thermally cycling the

sample by contacting the capillary vessel with a heated fluid to raise the temperature of the sample from a first temperature to a second temperature, cooling the sample from said second temperature to a temperature at least as low as the first temperature, and
5 heating the sample back to the second temperature; wherein the difference between the first temperature and the second temperature is at least 15°C, and wherein the heating and cooling step are completed in approximately 60 seconds or less, while the temperature homogeneity in the sample is maintained within plus or
10 minus 1°C during the heating and cooling steps.

36. In a method of amplifying a DNA sequence by thermal cycling of the nucleic acid sequence in the presence of a thermostable DNA polymerase, wherein each cycle comprises the steps
15 of heating a biological sample containing said DNA sequence to a denaturing temperature; holding the biological sample at the denaturing temperature; cooling the sample to an annealing temperature, holding the temperature at the annealing temperature for a pre-determined amount of time; warming the sample to an
20 elongation temperature; and holding the sample at the elongation temperature for a predetermined amount of time; the improvement

comprising limiting the holding time of the annealing and denaturing steps to less than one second each.

37. A method for improving the purity of a product produced
5 by polymerase chain reaction wherein a DNA sequence is amplified by
thermal cycling of the sequence in an aqueous sample in the
presence of a thermostable polymerase and wherein each thermal
cycle comprises heating the aqueous sample to a denaturation
temperature, holding it at the denaturation temperature for a
10 predetermined period of time, cooling the sample to an annealing
temperature and holding it at the annealing temperature for a
predetermined period of time, the method comprising the step of
limiting the time the sample is held at the annealing temperature
to less than 5 seconds.

15
38. The method of claim 37 wherein the sample is held at the
annealing temperature for less than one second.

39. The method of claim 37 further comprising the step of
20 cooling the sample from the denaturation temperature to the
annealing temperature at a rate of at least about 1.48°C per
second.

40. The method of claim 37 wherein each thermal cycle is completed in less than 60 seconds.

41. The method of claim 37 wherein the period of time the sample is held at the denaturation temperature during each thermal cycle is less than 32 seconds.

42. The method of claim 41 wherein the period of time the sample is held at the denaturation temperature during each thermal cycle is less than one second.

43. A method for increasing the yield of an amplified DNA sequence by use of polymerase chain reaction wherein the DNA sequence is thermally cycled in an aqueous sample in the presence of a thermostable polymerase and wherein during each thermal cycle the sample is heated to a denaturation temperature and held for a predetermined period of time, said method comprising the step of limiting the time the sample is held at the denaturation temperature to less than 32 seconds.

44. The method of claim 43 wherein the sample is held at the denaturation temperature for less than one second.

45. The method of claim 43 wherein each thermal cycle is completed in less than approximately 60 seconds.

46. In the construction of a thermal cycling device suitable
5 for performing polymerase chain reaction DNA amplification in which
the device comprises a closed-loop system, a fan for moving air in
the closed-loop system to transfer heat from a heat source to a
sample compartment in said closed-loop system, a temperature sensor
in the sample compartment, and a programmable temperature
10 controller for controlling the temperature in the sample
compartment, the improvement which comprises minimizing the thermal
mass of the device components in the closed-loop system in contact
with the air, installing air mixing baffles in the closed-loop
system, and selecting the fan and the heat source so that the
15 temperature in the sample compartment can be cycled between a DNA
denaturation temperature of at least 90° and a DNA-annealing
temperature in the range of about 50° to about 55°C in
approximately 30 to approximately 60 seconds while maintaining a
temperature gradient in the sample compartment of less than 2°C.

20

47. The improvement of claim 46 wherein the fan has the capacity of at least 75 cubic feet of air per minute.

48. A thermal cycling device for optimizing yield and purity of amplified DNA prepared by a process comprising thermal cycling of an aqueous sample comprising a DNA sequence and a thermostable polymerase between a DNA denaturation temperature and a lower DNA annealing temperature, said device comprising

a chamber for substantially confining and directing flow of air contained therein along a closed-loop path,

a sample compartment located in said chamber within said closed-loop path, a fan for moving air along said closed-loop path, means for heating air in said closed-loop path,

means for mixing air in the closed-loop path between the air heating means and the sample compartment,

a thermal sensor for providing a signal related to the temperature of said sample compartment,

a vent in the chamber to direct air from the closed-loop path and means for opening and closing said vent, and

a programmable controller for receiving the signal from the thermal sensor and for controlling the air-heating means and the vent opening and closing means to cycle the temperature of air in the sample compartment wherein the controller is programmable to cycle the temperature in the sample compartment between a DNA-denaturation temperature and a DNA-annealing temperature in 60

seconds or less while maintaining a temperature gradient in the sample compartment of less than 10°C.

49. The device of claim 48 wherein during thermal cycling,
5 the temperature gradient in the sample compartment is less than 2°C.

50. The device of claim 48 wherein during thermal cycling the temperature of a sample in the sample compartment can be held at a
10 DNA-denaturation temperature or a DNA-annealing temperature for less than 1 second.

51. The device of claim 48 wherein the temperature in the sample chamber can be cycled between a DNA-denaturation temperature
15 and a DNA-annealing temperature in approximately 30 seconds.

52. The device of claim 51 wherein during thermal cycling, the temperature gradient in the sample compartment is less than 2°C.

53. The device of claim 48 constructed so that the thermal mass of the device components in contact with air in the closed-loop path is minimized.

5 54. The device of claim 48 wherein in the capacity of the fan is at least 75 ft.³/min.

55. The device of claim 48 wherein the temperature of a sample in the sample compartment can be uniformly cycled at a rate
10 of temperature change of at least 1.48°C/sec.

56. The device of claim 48 wherein the temperature of a sample in the sample compartment can be uniformly cycled at a rate of temperature change of at least 4.11°C/sec.

15
REMARKS


After entry of this amendment, it is believed that all of the claims now pending are allowable. Thus, favorable action concerning these claims is respectfully requested. If any
20 impediment to the allowance of these claims remains after entry of this Amendment and consideration of these remarks the Examiner is invited to initiate a telephone interview with the undersigned.

Any deficiency in any fee submitted in connection with this paper may be charged to Deposit Account 20-0100.

DATED this 11th day of August, 1998.

5

Respectfully submitted,

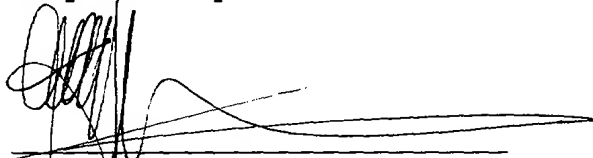

10

GRANT R. CLAYTON
Attorney for Applicant
Registration No. 32,462

15

THORPE, NORTH & WESTERN, L.L.P.
P.O. Box 1219
Sandy, Utah 84091-1219
Telephone (801) 566-6633
Facsimile (801) 566-0750

20

Docket 8616.cip3con
H:\FILES\8616\cip3\prelim_amend.wpd

EXPRESS MAIL LABEL NO. EL108261870US

PATENT APPLICATION

Attorney Docket

No. 8616.CIP3.CON

**METHOD FOR RAPID THERMAL
CYCLING OF BIOLOGICAL SAMPLES**

BACKGROUND

1. Related Applications.

This application is a continuation-in-part of U.S. patent application serial no. 08/179,969 filed January 10, 1994
5 entitled Rapid Thermal Cycling Device, U.S. Patent No. 5,455,175 issued on October 3, 1995.

2. The Field of the Invention.

This invention relates generally to apparatus for rapid control of the temperature of a liquid sample. More
10 specifically, the present invention relates to thermal cycling apparatus for precisely controlling and rapidly varying the temperature of a sample repeatedly through a predetermined temperatures cycle.

3. The Background Art.

15 In numerous areas of industry, technology, and research there is a need to reliably and reproducibly subject relatively small samples to thermal cycling. The need to

subject a sample to repeated thermal cycles is particularly acute in biotechnology applications. In the biotechnology field, it is often desirable to repeatedly heat and cool small samples of materials over a short period of time. One such biological process that is regularly carried out is cyclic DNA amplification.

Cyclic DNA amplification, using a thermostable DNA polymerase, allows automated amplification of primer specific DNA, widely known as the "polymerase chain reaction." Automation of this process requires controlled and precise thermal cycling of reaction mixtures usually contained in a plurality of containers. In the past, the container of preference has been a standard, plastic microfuge tube.

Commercial programmable metal heat blocks have been used in the past to effect the temperature cycling of samples in microfuge tubes through the desired temperature versus time profile. However, the inability to quickly and accurately adjust the temperature of the heat blocks through a large temperature range over a short time period, has rendered the use of heat block type devices undesirable as a heat control system when carrying out the polymerase chain reaction.

Moreover, the microfuge tubes which are generally used have disadvantages. The material of the microfuge tubes, their wall thickness, and the geometry of microfuge tubes is a hinderance to rapid heating and cooling of the sample contained therein. The plastic material and the thickness of the wall of microfuge tubes act as an insulator between the sample contained therein and the surrounding medium thus hindering transfer of thermal energy. Also, the geometry of the microfuge tube presents a small surface area to whatever medium is being used to transfer thermal energy. The continued use of microfuge tubes in the art, with their suboptimal geometry, indicates that the benefits of improved thermal transfer (which come by increasing the surface area of a sample container for a sample of constant volume) has heretofore not been recognized.

Furthermore, devices using water baths with fluidic switching, (or mechanical transfer) have also been used as a thermal cycler for the polymerase chain reaction. Although water baths have been used in cycling a polymerase chain reaction mixture through a desired temperature versus time profile necessary for the reaction to take place, the high

thermal mass of the water (and the low thermal conductivity of plastic microfuge tubes), has been significantly limiting as far as performance of the apparatus and the yields of the reaction are concerned.

5 Devices using water baths are limited in their performance. This is because the water's thermal mass significantly restricts the maximum temperature versus time gradient which can be achieved thereby. Also, the water bath apparatus has been found to be very cumbersome due to the size
10 and number of water carrying hoses and external temperature controlling devices for the water. Further the need for excessive periodic maintenance and inspection of the water fittings for the purpose of detecting leaks in a water bath apparatus is tedious and time consuming. Finally, it is
15 difficult with the water bath apparatus to control the temperature in the sample tubes with the desired accuracy.

U.S. Patent No. 3,616,264 to Ray shows a thermal forced air apparatus for cycling air to heat or cool biological samples to a constant temperature. Although the Ray device is
20 somewhat effective in maintaining a constant temperature within an air chamber, it does not address the need for

rapidly adjusting the temperature in a cyclical manner according to a temperature versus time profile such as is required for biological procedures such as the polymerase chain reaction.

5 U.S. Patent No. 4,420,679 to Howe and U.S. Patent No. 4,286,456 to Sisti et al. both disclose gas chromatographic ovens. The devices disclosed in the Howe and Sisti et al. patents are suited for carrying out gas chromatography procedures but do not provide thermal cycling which is
10 substantially any more rapid than that provided by any of the earlier described devices. Rapid thermal cycling, while potentially useful for many procedures, is particularly advantageous for carrying out the polymerase chain reaction. Devices such as those described in the Howe and Sisti et al.
15 patents are not suitable for efficiently and rapidly carrying out such reactions.

BRIEF SUMMARY AND OBJECTS OF THE INVENTION

In view of the above described state of the art, the present invention seeks to realize the following objects and
20 advantages.

It is an object of the present invention to provide an apparatus for accurately controlling the temperature of biological samples.

It is a further object of the present invention to
5 provide a thermal cycling apparatus for quickly and accurately
varying the temperature of biological samples according to a
predetermined temperature versus time profile.

It is another object of the present invention to provide
an apparatus suitable for subjecting a number of different
10 biological samples to rapid thermal cycling.

It is also an object of the present invention to provide
a thermal cycling apparatus having a thermal transfer medium
of low thermal mass which can effectively subject samples to
a large temperature gradient over a very short period of time.

15 It is a further object of the present invention to
provide an apparatus which can subject a biological sample to
rapid thermal cycling using air as a thermal transfer medium.

It is another object of the present invention to provide
a thermal cycling apparatus which will heat samples located in
20 a fluid chamber therein, by means of an internal heater, and
will subsequently cool the samples by moving ambient fluid

into the chamber, at the proper time in the thermal cycle, to cool the samples.

These and other objects and advantages of the invention will become more fully apparent from the description and
5 claims which follow, or may be learned by the practice of the invention.

The present invention is an apparatus particularly suited for subjecting biological samples to rapid thermal cycling in order to carry out one or more of a number of procedures or
10 processes. In one of its preferred forms, the apparatus includes a means for holding a biological sample. The means for holding a biological sample, or a sample chamber, is provided with an insulation means for retaining thermal energy and also a means for heating the interior of the sample
15 chamber. Preferably, a high wattage incandescent lamp functions as a means for heating the interior of the sample chamber. A thermal insulator lines the interior of the sample chamber and functions to retain the heat generated by the lamp within the sample chamber and serves as an insulation means.

20 In order to rapidly cool the sample chamber, the preferred apparatus includes a means for forcing air into the

sample chamber and a means for dispersing the air forced into the sample chamber. A high velocity fan functions to force air into the sample chamber and a rotating paddle functions to disperse the air into the chamber. A means for venting allows
5 the air to escape from the sample chamber taking the unwanted heat with it. The present invention allows heating and cooling of a sample to take place both quickly and uniformly.

The apparatus of the present invention includes a control means for operating the apparatus through the desired time
10 versus temperature profile. The present invention is particularly well suited for carrying out automated polymerase chain reactions.

Other embodiments of the present invention include a closed loop hot fluid compartment and a reaction compartment.
15 The reaction compartment is located within the hot fluid compartment and can be accessed through a venting door for allowing the insertion of samples in capillary tubes which may contain a reaction mixture for the polymerase chain reaction. A heating coil is also located in the compartment and is
20 regulated by a programmable set-point process controller via

a thermocouple sensor which is also located in the compartment at a position directly adjacent the reaction compartment.

The heat coil is located up-stream of the reaction compartment, and a fan is located up-stream of the heat coil, such that, fluid blown across the heat coil by the blower unit passes through the reaction compartment and into the intake side of the blower unit in closed loop fashion. Baffles may be located between the heat coil and the reaction compartment in order to cause uniform homogenous mixing of the heated fluid before it passes through the reaction compartment.

Alternately, the fan may be placed downstream of the heating coil but before the reaction compartment. In this case, the fan blades serve as baffles to mix the heated fluid. At the correct time in the predetermined thermal cycle, the controller activates a solenoid that opens the venting door which vents fluid out of the compartment and allows cool (ambient) fluid to enter and cool the samples.

The controller of the present invention allows the chamber, and subsequently the samples located in the sample compartment therein, to pass through a predetermined temperature cycle corresponding to the denaturation, annealing

and elongation steps in the polymerase chain reaction. In use, the apparatus of the present invention allows rapid optimization of denaturation, annealing, and elongation steps in terms of time and temperature, and shortened time periods
5 (ramp times) between the temperatures at each step.

The present invention particularly decreases the total time required for completion of polymerase chain reaction cycling over prior art thermal cycling devices while at the same time significantly increasing specificity and yield.

10

BRIEF DESCRIPTION OF THE DRAWINGS

In order to better appreciate how the above-recited and other advantages and objects of the invention are obtained, a more particular description of the invention briefly described
5 above will be rendered by reference to specific embodiments thereof which are illustrated in the appended drawings. Understanding that these drawings depict only a typical embodiment of the invention and are not therefore to be considered limiting of its scope, the invention will be
10 described and explained with additional specificity and detail through the use of the accompanying drawings in which:

Figure 1 shows a perspective view of a thermal cycling apparatus adapted for thermal cycling of biological samples and adapted especially for use in cyclic DNA amplification,
15 according to the concepts of the present invention;

Figure 2 is a side elevation view of the fluid chamber portion of the apparatus of Figure 1;

Figure 3 is an interior plan view of the fluid chamber portion of the apparatus illustrated in Figure 1;

20 Figure 4 shows an interior plan view of the fluid chamber of another embodiment of the present invention;

Figure 5 shows an optimized temperature versus time profile for a polymerase chain reaction using the thermal cycling device of the present invention;

Figure 6 shows graphically the effect of annealing time
5 on polymerase chain reaction specificity and yields using the thermal cycling device of the present invention;

Figure 7 shows graphically the effect of denaturation time on polymerase chain reaction yields using the thermal cycling device of the present invention;

10 Figures 8A-B, which are perspective and elevational cross sectioned views, respectively, of another preferred embodiment of the present invention;

Figure 8C is a diagrammatic representation of the relationship of the heat producing element and the capillary
15 tubes holding the biological samples in the embodiment illustrated in Figures 8A-B;

Figure 9A shows the results of four different temperature/time profiles (A-D) and their resultant amplification products after thirty cycles (A-D).

20 Figure 9B shows a cycle of another preferred temperature/time profile used by the present invention;

Figures 9C-G show exemplary cycle of other preferred temperature/time profiles used by the present invention; and

Figure 10 provides a block diagram of a temperature slope control circuit in accordance with the present invention.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made to the drawings wherein like structures will be provided with like reference designations.

As shown in Figure 1, the thermal cycling device 10 includes a closed loop fluid (most preferably air) chamber, 10 generally designated at 11, which is adapted to accept samples to be cycled through vent door 14. The closed loop fluid chamber 11 includes a plurality of compartments each of which will be described shortly. The device 10 also includes a controller 12 which can be programmed by means of input keys 15 25 and display 26 to cause the chamber 11 to be cycled through a series of temperatures over a predetermined period of time. The thermal cycling of chamber 11 can be used to carry out numerous procedures and is particularly suited for amplification of primer specific DNA from samples containing 20 reaction mixture as will be explained below.

The closed loop fluid chamber 11 is enclosed in a generally box shaped configuration by housing 13. Blower mounting boards 16, if desired, can be located so as to section off a smaller rectangular section of the chamber 11 and function to support and secure a generally cylindrically shaped lower housing 15 thereto. Alternatively, the fan of the blower 28 may be housed integrally within chamber housing 13.

The interior of blower housing 15 contains the blades and shaft of the blower. The blower motor (not shown) is located externally of blower housing 15, and therefore exteriorly of the enclosed chamber 11. In this configuration, the blades and shaft are the only parts of the blower which become exposed to the circulating hot fluid within chamber 11. It would be disadvantageous to mount the motor within the chamber which would subject the motor to temperature variations and also would add the thermal mass of the motor to that which is subject to heating and cooling. The reduction of thermal mass exposed to the fluid in chamber 11 is important to the overall performance of the device 10 in its function of subjecting

samples placed therein to predetermined temperature versus time profiles as will be more fully explained below.

The blower 28 is a well known type blower usually identified as an "in line" type blower which preferably
5 employs a propeller type fan due to its generally low thermal mass, or if desired, a squirrel cage type fan, the fan preferably having a 75 cubic feet per minute minimum capacity.

The solenoid platform 17 has secured thereto a solenoid 18. The solenoid armature 19 is attached to upper end 21 of
10 rod 20 which is rigidly attached to vent door 14 and rotatably attached to housing 13 at points above and below the vent door 14. The rod 20 therefore allows vent door 14 to freely rotate relative to the housing 13 about the rod's longitudinal axis.

A spring 22 is attached at one of its ends to the housing
15 13 by support post 23. The opposite end of spring 22 is attached to the top end 21 of rod 20 directly adjacent the attachment of solenoid armature 19. The spring 22 is drawn between these two attachment points so as to be in tension. The spring 22 therefore tends to draw top end 21 toward the
20 support post 23, which in turn tends to rotate vent door 14 to its closed position. When solenoid 18 is actuated, armature

19 tends to pull top end 21 of the rod 20 in the direction of the solenoid 18, which is opposite the direction of pull of spring 22, and which tends to open the vent door 14.

Controller, generally designated at 12, is electrically
5 attached to the chamber 11 by means of a transmission cable 24. The cable 24 also supplies power to the blower motor (not shown), and to the heat coil 31. Further, the controller 12 also is connected to thermocouple sensor 35 for receiving signals corresponding to temperature data, and to solenoid 18
10 for triggering the solenoid armature.

Controller 12 can be any well known type of temperature controller unit which is programmable to control the heat coil 31, vent door 14, and blower so as to achieve predetermined temperatures as a function of time within the chamber 11, and
15 which is also capable of being programmed to actuate a relay output for driving a solenoid at predetermined time periods and chamber temperature levels. A preferred temperature controller 12 for use in the embodiment of Figures 1-3 is a Partlow MIC-6000 proportional temperature controller,
20 available through Omega Engineering Inc, of Stanford, Connecticut, as the Model No. CN8600 process controller.

As shown in Figures 2 and 3, the interior of chamber 11 is sectioned off into four main compartments. The blower compartment 28 is formed of the blower housing 15 and the blower mounting plates 16. The entirety of blower compartment 5 28 is filled with the fan and shaft portions of a blower as has been described above. The blower can be any of a number of well-known designs, as has been described above, and has therefore been omitted from Figure 3 for purposes of clarity. It is sufficient for the present invention to understand that 10 the fan located in blower compartment 28 draws fluid into the blower compartment 28 through inlet opening 36 and pushes the fluid out of exit opening 37.

It is preferred that the fluid be driven by the blower at a rate of at least 75 cubic feet per minute. It is important 15 however, in regard to the present invention, to realize that the fluid located in chamber 11 only contacts the fan and a portion of the drive shaft of the blower, the blower motor itself being located outside of the blower housing 15 so as to avoid any contact thereof with fluid in the chamber 11. This 20 is important since it is critical to the speed of operation of the invention to minimize the material which contacts the

fluid inside the chamber 11 so as to minimize the thermal mass of material which must be heated and/or cooled thereby during the cycling process. By minimizing the thermal mass which must be heated or cooled by the fluid, the response time
5 necessary to bring the contents of chamber 11 to a uniform temperature is greatly diminished.

Fluid exiting blower compartment 28 through outlet opening 37 enters heating compartment 29. Fluid passing into heating compartment 29 must pass by heating coils 31. If
10 heating coils 31 gets hotter than the fluid passing into heating compartment 29, the fluid will become heated thereby as it is forced through the compartment. The heating coil is preferably a 1,000 watt (125 VAC) nichrome wire coil wound around a microsupport. However, any heating unit suitable for
15 heating the type of fluid present in the chamber may be used. The particular heating coil of embodiment of Figures 1-3 is manufactured by Johnstone Supply, of Portland, Oregon.

The heating coil is activated by an output relay included in the controller 12. The preferred relay is a 25 A, 125 VAC
20 solid state relay manufactured by Omega Engineering Inc. of Stanford, Connecticut as Model No. Omega SSR 240 D25.

Fluid passing through heating compartment 29 becomes incident on baffles 32 and 33 before passing into the reaction compartment 30. Baffles 32 and 33 tend to break up any laminar fluid flow and generate turbulence therein to effectively mix the fluid so that it arrives in reaction compartment 30 at an homogenous temperature.

Thermocouple sensor 35 provides an electrical input signal to controller 12 which corresponds to the fluid temperature in the reaction compartment 30. Temperature monitoring during operation of the thermal cycling device 10 is preferably achieved by a 30-gauge iron-constantan "J-type" thermocouple. The controller uses this information to regulate the heat coil 31 according to the predetermined temperature versus time profiles programmed therein and to actuate solenoid 18, as will be explained momentarily.

The fluid passing from the reaction compartment 30 to the return air compartment 34 must pass through sample compartment 27 (as shown in dashed lines). Sample compartment 27 will also be explained momentarily.

The fluid in return compartment 34 has been slightly cooled due to the heat transfer therefrom into samples located

in sample compartment 27. The fluid in return compartment 34 is drawn through inlet opening 36 into blower compartment 28 where it is again forced, by action of the fan, out through outlet opening 37 into the heating compartment 39. Thus, the
5 fluid chamber 11, when operating with vent door 14 closed, is a closed loop fluid chamber which continuously recirculates the fluid along a closed loop path through each compartment thereof in order to bring the contents therein to a uniform temperature. Continuous circulation of the air in the air
10 chamber 11 allows the samples in sample compartment 27 to be brought to a predetermined temperature as quickly as possible, and then to be held at that temperature, if desired.

When the device 10 must be used to not only heat material located in the reaction compartment 27, but also to
15 subsequently cool these materials as quickly as possible to a temperature at or above the ambient fluid (air) temperature, the controller 12 can be programmed to actuate solenoid 18 to cause vent door 14 to open and allow large quantities of ambient fluid to immediately flood the compartment 11 while
20 heated fluid therein simultaneously escapes.

Deactivation of the heating coil 31 while continuing activation of the blower with vent door 14 open, will draw ambient fluid into return compartment 34 and from there into the blower compartment 28. The blower will then push this ambient fluid through heating compartment 29 where it will pass directly into reaction compartment 30 without being heated by coil 31. The ambient fluid then passes through the sample compartment 27 and escapes out of chamber 11 through the vent door 14. Due to the minimum thermal mass of material located in chamber 11, and the action of the blower fan, vast quantities of ambient fluid will be forced past the sample compartment 27, and from there out of the chamber 11. Thus, rapidly cooling of samples or material located in the reaction compartment 27 is obtained.

The sample compartment 27 is sized so as to allow a plurality of samples, such as hollow elongate glass tubes containing a sample therein, to be easily located in a space apart orientation so that fluid may pass evenly around each sample. If desired, sample compartment 27 may be sized and configured so as to allow insertion of a rack, basket, or the

like which has been configured so as to accept a plurality of samples in uniform spaced apart configuration so as to simplify loading the samples into the sample chamber 27.

Access to sample compartment 27 is accomplished by
5 rotation of the vent door 14 to its open position. Once the vent door 14 is rotated to approximately 90 degrees from its closed position, the sample compartment 27 is easily accessible therethrough. Also, as can be seen, rotation of vent door 14 approximately 90 degrees from its closed position
10 causes return fluid compartment 34 to be substantially closed off from reaction compartment 30. Thus, when the device 10 of the present invention is in a "cooling" mode, ambient fluid enters directly into return fluid compartment 34 and is forced through the blower compartment 28, heating compartment 29,
15 reaction compartment 30, and sample compartment 27 substantially along the same path as the closed loop fluid flow path described above. The fluid is then forced out of the air chamber 11 and prevented from passing back into air return compartment 34 by the positioning of the vent door 14
20 between the sample compartment 27 and the return fluid compartment 34.

Thus, the vent door 14 not only allows ambient fluid to enter the chamber 11, it can also prevent the fluid from recirculating in a loop fashion through the chamber 11. Instead, fluid is forced to pass through the sample
5 compartment 27 and then out of the chamber 11 to aid in the rapid cooling of the sample contents and chamber 11.

When the device 10 of the present invention is used for cyclic DNA amplification, repetitive cycling through a temperature versus time profile is required. Samples
10 containing a reaction mixture for the polymerase chain reaction generally must be cycled approximately 30 times through a temperature versus time profile which corresponds to the denaturation, annealing and elongation phases of the amplification process.

15 The device 10 of the present invention, due to its lower overall thermal mass, is capable of cycling samples through significantly shortened temperature versus time profiles compared to the prior art. The DNA amplification application of the embodiment of Figures 1-3 can pass through a
20 temperature versus time profile cycle in 30-60 seconds (see Figure 5). This same cycle using prior art devices would take

approximately 5-10 times longer. These low cycle times have proven also to increase yield and specificity of the polymerase chain reaction over prior art cycling.

5

EXAMPLE 1

The polymerase chain reaction was run in a 10 μ l volume with 50 ng template DNA, 0.5 mM of each deoxynucleotide 500 nM of each oligonucleotide primer in a reaction buffer consisting of 50 mM Tris-HCl (pH 8.5 at 25°C), 3.0 mM magnesium chloride, 10 20 mM HCl, and 500 μ g/ml bovine serum albumin (5). Thermos aquatics polymerase (0/4 units of Taq polymerase - Stratagene™) was added, the samples placed in 8 cm long, thin-walled capillary tubes (manufactured by Kimble, Kimax 46485-1), and the ends fused with a laboratory gas burner so 15 that an air bubble was present on both ends of each tube.

The capillary tubes were then placed vertically in a holder constructed of 1 mm thick "prepunched perfboard" (manufactured by Radio Shack). The mixture was cycled 30 times through denaturation (90-92°C), annealing (50-55°C), and 20 elongation (72-75°C) for the times indicated in the temperature versus time profile of Figure 5. Temperature

monitoring of the capillary tubes was done with a miniature thermocouple (IT-23, Sensortek, Clifton, NJ) placed in 10 μ l of deionized water and connected to a thermocouple monitor (BAT-12, Sensortek). Amplification products were fractionated
5 by electrophoresis on a 1.5% agarose gel. Good results were obtained.

Due to the fact that the device 10 of the present invention cycles air as the heat transfer medium instead of
10 water, it has the advantage that heat transfer occurs through a low heat capacity medium (air) which can be warmed very rapidly.

The response time for sample cooling is very fast due to the use of thin walled glass capillary tubes for holding
15 samples, instead of plastic microfuge tubes as has been done in the past with prior art processes, and by minimizing the thermal mass of material inside the chamber 11 (see Figure 5). Such response times can allow for optimization of the denaturation and annealing, and elongation steps in the
20 polymerase chain reaction, in terms of time and temperature.

Further, shortened "ramp" times are obtained, i.e., the time required to bring the temperature of the sample from one temperature level to the next temperature level corresponding to phases in the amplification process is shortened. This decreases the time required for a complete amplification, as well as allowing specific study of annealing, denaturation and enzyme kinetics within a polymerase chain reaction protocol.

The baffles 32 and 33 (as shown in Figure 3) may be used if desired to achieve adequate temperature homogeneity within the sample compartment 27. As shown in this embodiment, baffles 32 and 33 decrease the temperature variation in the reaction compartment 30 from about 10°C, to about 2°C. If desired, further (or more complicated) baffles may be used to further decrease the temperature variation in reaction compartment 30. Alternately, as shown in Figure 4 the fan may be positioned downstream from the heating coil 31, but before the sample compartment 27 to achieve more uniform mixing.

Amplification products obtained through the use of apparatus 10 are qualitatively and quantitatively similar to those obtained through the manual water bath cycling method. However, advantages in specificity and yield are possible with

rapid thermal control of the reaction mixture. Figure 6 shows the effect of varying the denaturation time of the temperature versus time profile of Figure 5 as used with the thermal cycling apparatus 10 of the present invention on DNA amplification yields. The brighter vertical lines each correspond to a particular time at a denaturation temperature. As can be seen, the yield is greatest at the shortest possible denaturation time. Such a rapid response is not possible with prior art systems.

Figure 7 shows the effect of the temperature versus time profile of Figure 5 as used with the thermal cycling apparatus 10 on specificity (i.e., one specific product yield as opposed to a plurality of similar or "shadow" products). As can be seen, the shorter the ramp and annealing time, the greater the product specificity. The rapid temperature response of the apparatus 10 allows improved specificity and yield which is not possible with prior art systems.

As has been shown, by decreasing the thermal capacity (thermal mass) of the apparatus 10, the present invention can markedly decrease the total time required for the polymerase chain reaction. In addition, the use of small samples reduces

the amounts of expensive reagents which must be used by up to about 90% thus further reducing the cost of carrying out procedures using the present invention. For example, capillary tubes 108 having inner diameters in the range from
5 about 0.25mm to about 1.0mm can desirably be used. In some applications, capillary tubes 108 having inner diameters in the range from about 0.02mm to about 0.1mm can also be desirably used.

30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679

earlier explained components and teachings also have application in the embodiment illustrated in Figures 8A-C. Thus, only the pertinent additional information concerning this embodiment will be provided below. Importantly, in the
5 embodiment of Figures 8A-C, the heat producing element is adjacent to the biological sample containers allowing faster heating and cooling of biological samples as explained below.

As will be appreciated shortly, the apparatus of Figures 8A-C provides even greater improvement over the prior art in
10 the speed at which thermal cycling can be carried out, e.g., 15 or 30 cycles of DNA amplification in 30, 15, 10 to 5, or even fewer, minutes. Furthermore, the apparatus 100 provides better thermal homogenization throughout the samples than previously possible.

15 Shown in Figure 8A is the general configuration of the housing 102 of the embodiment. The housing 102 rests on feet 104 (best seen in Figure 8B) and functions to hold the other described structures in place and to isolate those structures which become hot from the surrounding environment. Included
20 in the embodiment 100 of Figure 8A are input keys 25 and a display 26 as in the previously described apparatus 10. The

previously described control structures can readily be modified or used as a pattern for a control means for use in the embodiment of Figures 8A-C.

As shown best in the cross sectional view of Figure 8B,
5 a sample chamber is designated by bracket 106. A lid 138 connected to the housing 102 by a hinge 131 can be opened to allow access to the sample chamber 106. The sample chamber 106 is preferably cylindrical in shape but can be of any shape or size required by the particular application.

10 The sample chamber 106 is lined with a black colored foam material 110 whose surface has light absorbing characteristics with the bulk of the thickness of the foam having insulating characteristics. The black foam material can be one which is readily available in the art and one fabricated from a plastic
15 material. The foam 110 is preferably a material which is readily cooled by the air passing there over, i.e., the material has low thermal conductivity and a porous surface.

The dark or black porous surface of the material converts shorter wavelength radiation striking the surface into longer
20 wavelength radiation, i.e., heat, which is radiated into the sample chamber.

The foam 110 functions to thermally isolate the sample chamber from the surrounding air space in the housing and also to convert the light emitted by lamp 112 into thermal energy. The foam 110 can be replaced with other structures. For
5 example, a material having a black, dark, or other nonreflective surface, such as a thin sheet of polycarbonate having one surface painted black, can be backed by an insulative material, such as a fiberglass or foam material. The black or dark surface, which can be painted on a number of
10 different substrates, converts shorter wavelength radiation striking it into thermal radiation while the insulative material thermally isolates the sample chamber from the surrounding environment. Thus, using the teachings provided herein, those skilled in the art can utilize many different
15 materials and structures as a lining for the sample chamber.

The lamp 112 is preferably a 500 watt halogen lamp. If appropriate control devices are used, higher power lamps or a plurality of lamps, such as four 500 watt halogen lamps, can be used. A lamp socket 112A is attached to the housing 102 by
20 a support 112B. The lamp 112 is able to very rapidly and uniformly heat the sample chamber 106 to the desired

temperature. Other sources of heat, i.e. infrared radiation, such as the earlier described nichrome wire element, can also be used within the scope of the present invention.

Represented in Figure 8B are two thin-walled capillary
5 tubes 108 such as those described earlier. While two thin-walled capillary tubes 108 are shown, the sample chamber 106 can hold many such tubes. The thin-walled capillary tubes 108 have several important advantages over previously used devices as described earlier and, together with the sample chamber
10 106, function as the one presently preferred example of a means for holding a biological sample.

It will be appreciated that many other structures performing equivalent or similar functions can also be used. The thin-walled capillary tubes 108 are preferably left
15 partially extending out of the sample chamber through apertures 140 for ease of access but may be completely contained within the sample chamber 106 as may numerous other fluid holding structures which are suited to particular applications. The preferred thin-walled capillary tubes 108
20 have a capacity of about 10 μ l. As will be understood, the volume of the sample should be keep small, and the surface

area of the sample holding structure relatively large, and together they should present a relatively small thermal mass. It is also preferred that the sample holding structure contain a volume anywhere from about 0.1 μl to about 10,000 μl but those skilled in the art will appreciate that other volumes of samples can also be used within the scope of the present invention if the different thermal mass of the structure is considered.

The lamp 112 and the insulative foam 110 together provide rapid and uniform heating of the sample contained in the thin-walled capillary tubes 108 and the air contained within the sample chamber 106. A thermocouple 134 is included within the sample chamber 106 to sense the temperature within the chamber and is used to maintain the desired temperature within the sample chamber as earlier described.

The thermocouple 134 is preferably one available in the art whose thermal response substantially matches the thermal response of the biological sample and the container holding the same. Such thermocouples can be commercially obtained from sources such as Idaho Labs which manufactures a line of thermocouples referred to as metal sheathed, J-type

thermocouples. The matching of the thermal response of the thermocouple to that of the biological sample and container can be preferably carried out by inserting a micro thermocouple, such as the model IT-23 thermocouple available
5 from PhysiTemp as known in the art, into a typical biological sample being held by the chosen container and subjecting the sample and the thermocouple under test to the same temperature changes. The thermocouple under test, or some external criteria, can be changed until the thermal response of the
10 thermocouple suitably matches the thermal response of the sample and its container.

The arrangement represented in Figure 8B provides more uniform heating and cooling of the sample than previously available devices. In previously available devices, transfer
15 of heat throughout the sample is carried out by convection through the sample. Convection induced movement of the sample within whatever structure is used to hold the sample is caused by temperature gradients or differences in the generally small biological samples (e.g., 10-100 μ l).

20 The effect of temperature gradients within the sample become more pronounced and more difficult to control as the

cycle time for a sample decreases. The existence of uneven temperatures within a sample, and particularly the reliance on "mixing by convection" within the sample by the prior art devices, generally increases the cycle time for a sample and likely has deleterious effects on the biological sample. The apparatus 100 is capable of providing heating and cooling such that thermal differences within a 10 μ l sample are maintained at not greater than $\pm 1^{\circ}\text{C}$ at all times during a 30 second cycle.

10 In order to promote uniform heating and cooling, it is preferred that the thin-walled capillary tubes 108 be at least somewhat uniformly spaced from the heat source, for example, lamp 112 in apparatus 100. Figure 8C provides a diagrammatic top view of the lamp 112 and the plurality of thin-walled capillary tubes 108 as arranged in the apparatus 100 represented in Figures 8A-B.

15 In the arrangement represented in Figure 8C, the thin-walled capillary tubes 108 which are farthest from the lamp 112 (as indicated by line F) are preferably no more than substantially 40%, and more preferably no more than substantially 25%, farther from the lamp 112 than the distance

between the lamp 112 and those thin-walled capillary tubes 108 which are closest to the lamp 112 (as indicated by line N). For example, the distance indicated by line N can be about 7.3 cm while the distance indicated by line F can be about 8.5 cm.

5 It will be appreciated that the arrangement of the thin-walled capillary tubes 108 can be other than that represented in the figures, for example, circular or semi-circular. Moreover, it will be appreciated that the point from which to measure the distance between the heat producing element and
10 the sample containers will vary as the type and size of the heat producing element varies. For example, the heat producing element may comprise a plurality of lamps or electric resistive elements which vary in shape and size. In some embodiments, it may also become important to consider the
15 distance from the sample chamber wall the sample containers are positioned. In the illustrated embodiment, the apertures 140 (see Figure 8A) function as a means for holding the sample containers but other structures performing equivalent functions can also be used in accordance with the present
20 invention.

The apparatus 100 also cools the samples contained in the capillary tubes 108 very rapidly and uniformly. In order to cool the sample chamber 106, air from outside the housing 102 is draw into the interior of the housing through a lower housing portal 114 by a fan 116 which is connected to a motor shaft 122 driven by a motor 118. Since rapid cooling of the sample chamber is desired, it is preferred that the combination of the motor 118 and the fan 116 be able to move sufficient volumes of air into the sample chamber 106 and then disperse that air inside the sample chamber 106, as will be explained shortly. Arrangements other than the motor 118 and fan 116 illustrated in Figure 8B can also be used within the scope of the present invention.

The use of air as the thermal transfer medium, in contrast to other gases and liquids, has the advantages of being inexpensive, readily available, easily mixed, and never making a mess. In the case of the described embodiments, the high surface area-to-volume ratio of the sample containing capillary tubes provides for rapid thermal transfer using air as the thermal transfer medium.

During cooling portions of the thermal cycle, the action of the fan 116 draws ambient temperature air into the housing 102. A vent door 128, articulating on hinge 129, is provided. The vent door 128 is automatically opened by way of a solenoid 132 so that the interior of the housing 102 is sealed off from the upper housing portal 130. In some embodiments, the solenoid 132 is preferably replaced by a stepper motor as is known in the art. The use of a stepper motor allows the vent door 128 to be accurately and incrementally opened and closed in accordance with the needs for heating and cooling the samples. Those skilled in the art will be able to derive an appropriate control mechanism for use with a stepper motor, for example an SC-149 stepper motor controller (available from Alpha Products) as known in the art, using the information set forth herein.

Due to the arrangement of the lower sample chamber portal 120 and the larger cross sectional area and position of the upper sample chamber portal 126, room temperature air is moved into the sample chamber 106 and is dispersed and mixed within the sample chamber 106 by a paddle 124 which is connected to the motor shaft 122. The paddle 124 should rotate at a

relatively high rate, for example, fast enough to create air velocities of around preferably about 250, more preferably 500, and most preferably 1000 meters per minute within the sample chamber 106. With the paddle 124, which can be a
5 single or a multivane paddle, rotating at a high speed, air is moved, or drawn, into the sample chamber 106 and vented out of the sample chamber 106 following the path indicated by the dashed line 136. The rotation of the paddle 124 also promotes mixing of the air entering the sample chamber 106 and ensures
10 the most efficient transfer of thermal energy from the surfaces of the thin-walled capillary tubes 108 to the air passing through the sample chamber 106. It will be appreciated that structures other than those illustrated herein can perform equivalent functions.

15 As the solenoid 132 is actuated to open the vent door 128, all of the room temperature air moved into the sample chamber 106 is exhausted through a sample chamber upper portal 126 and then through the upper housing portal 130 carrying the heat from the sample chamber 106 to the surrounding
20 atmosphere. The rapid mixing of the air that passes through,

and is disbursed in, the sample chamber 106 results in rapid and uniform cooling of the samples.

Example 2

5 Figure 9A shows the results of four different temperature/time profiles (A-D) and their resultant amplification products after thirty cycles (A-D). The profiles A and B in Figure 9A were obtained using a prior art heating block device using the prior art microfuge tube. As
10 can be seen in Figure 9A, the transitions between temperatures are slow and many nonspecific bands are present in profiles A and B. Profile B shows improvement in eliminating some of the nonspecific bands (in contrast to profile A) by limiting the time each sample remains at each temperature thus indicating
15 that shorter times produce more desirable results.

 Profiles C and D were obtained using the apparatus of Figures 8A-B. As can be seen in Figure 9A, amplification is specific and, desirably, even though yield is maximal in C (60 second elongation) it is still entirely adequate in D (10
20 seconds elongation).

The optimal times and temperatures for the amplification of a 536 bp fragment of β -globin from human genomic DNA were also determined. Amplification yield and product specificity were optimal when denaturation (93°C) and annealing (55°C) were less than 1 second. No advantage was found to longer denaturation or annealing times. The yield increased with longer elongation times at (77°C) but there was little change with elongation times longer than 10-20 seconds. These unexpected results indicate that the previously available devices used for DNA amplification are not maximizing the conditions needed to optimize the physical and enzymatic requirements of the reaction.

Further information can be obtained from: Wittwer, Carl T., Marshall, Bruce C., Reed, Gudrun B., and Cherry, Joshua L., "Rapid Cycle Allele-Specific Amplification with Cystic Fibrosis ΔF_{508} Locus," 39 Clinical Chemistry 804 (1993) and Wittwer, Carl T., Reed, Gudrun H., and Ririe, Kirk M., "Rapid DNA Amplification," THE POLYMERASE CHAIN REACTION 174 (1994) which are both now incorporated herein by this reference.

From the information provided in Figure 9A, it can be seen that the embodiments of the present invention subject the samples placed therein to rapid thermal cycling wherein the temperature of the sample is increased and decreased at a rate preferably at least as great as 0.5°C/second. In the case of the present invention carrying out the polymerase chain reaction, the temperature change is preferably carried out over an approximate range of between 30°C to 50°C. It is preferred that the thermal cycles be carried out quickly enough to complete at least thirty thermal cycles in forty minutes and more preferably complete thirty thermal cycles in twenty minutes and most preferably complete thirty thermal cycles in ten minutes.

The apparatus 100 more preferably increases and decreases the temperature of the sample at a rate at least as great as 1.0°C/second and even more preferably at a rate at least as great as 4.0°C/second and most preferably at a rate at least as great as 10.0°C/second. Critically, the biological sample, not just the surrounding medium and/or the sample container, must undergo the specified thermal change. The previously available devices, while having the drawback of not able to

perform thermal changes as rapidly as the present invention, also did not recognize the problem of changing the temperature of the sample, not just the temperature of the surrounding medium and container, rapidly and uniformly.

5 Referring now to the chart of Figure 9B, the method of the present invention can desirably achieve thermal cycling preferably at a rate at least as great as $10^{\circ}\text{C}/\text{sec.}$, and more preferably at a rate at least as great as $20^{\circ}\text{C}/\text{sec.}$, over a temperature range of greater than about 20°C , more preferably
10 over a temperature range of greater than about 30°C , and most preferably over a temperature range of about 40°C . Figure 9B shows the temperature in $^{\circ}\text{C}$ of the biological sample, not just the surrounding air or container, as the biological sample undergoes the thermal cycle. Figure 9B shows a PCR sample
15 beginning at about 74°C and being heated to a denaturation temperature, indicated at D, of about 92°C for 2 seconds. The sample is then cooled to an annealing temperature, indicated at A, of about 55°C for two seconds. The transition between the denaturation temperature and the annealing temperature
20 covers a range of 37°C in just under 4 seconds providing a rate at least as great as $10^{\circ}\text{C}/\text{sec.}$ The sample is then warmed

to an extension temperature of 74°C for five seconds as indicated at E in Figure 9B. The cycling of the sample through the denaturation temperature, the annealing temperature, and the extension temperature is repeated thirty
5 time or as many times as desired.

Figures 9C-G show exemplary cycles of other preferred temperature/time profiles which are achieved by the present invention. It will be understood that those skilled in the art can alter the represented temperature/time profiles to
10 carry out specific processes in accordance with the present invention. Those skilled in the art will also appreciate that the previously available devices and methods, such as devices which conduct heat to and from the sample via a solid or liquid, cannot provide, and do not suggest or teach, the
15 temperature/time profiles described herein. Furthermore, it will be appreciated that the previously available devices and methods utilizing air and the transfer medium, for example previously available chromatographic ovens, cannot provide, and do not suggest or teach, the temperature/time profiles
20 described herein.

In order to provide the fastest thermal cycling time, it is preferred that the lamp (112 in Figures 8A and 8B) be rated at 2000 watts or a plurality of lamps be included which provide similar output. It is also preferred to include a temperature slope control circuit which is represented in Figure 10 in conjunction with an A-bus controller/acquisition system using an 8052 micro controller board with a clock and high level program interpreter available from Alpha Products (model no. SP-127) of Darian, Connecticut. Exemplary programming code used in connection with the described microcontroller is included in the Programming Code Appendix attached hereto and incorporated herein. The programming code provided in the Appendix is a BASIC52 file for serial downloading into the microcontroller and provides exemplary temperature slope control during thermal cycling. Use of the 2000 watt heat producing device and the describe control structures allows rates of 20°C/sec. to be desirably obtained.

The preferred arrangement for the temperature slope control circuit represented in Figure 10 will be explained with the understanding the additional necessary components not

explicitly illustrated in Figure 10 can readily be supplied by those skilled in the art.

The temperature slope control circuit of Figure 10 includes a thermocouple 200 matched to the sample temperature response as explained earlier. The thermocouple 200 is connected to an integrated circuit 206, which preferably is one known in the art as an AD595, whose output is conveyed to a 4th order low pass filter 208 with a cutoff frequency of 100 Hz and to a 12 bit analog-to-digital convertor 210 whose output is used to provide a digital display of the temperature.

The output of the circuit 206 is also conveyed to a measured slope circuit 212. The measured slope circuit 212 preferably includes a 353 operational amplifier 218, a 100 K Ω potentiometer 214, a 1 M Ω potentiometer 230, and a 22 μ F capacitor. The measured slope circuit 212 outputs a signal to the inverting input of a 353 operational amplifier 246.

A slope set circuit 222 includes a positive slope set digital-to-analog converter 226 and a negative slope set digital-to-analog converter 224. The digital-to-analog converters 224 and 226 are preferably 8-bit digital-to-analog

converters referred to in the art as DA147. The slope set circuit can preferably receive instructions from another digital device (not illustrated in Figure 10) such as a personal computer. The output of the slope set circuit 228 is
5 communicated to a summing circuit 240.

The summing circuit 240 preferably includes 100 K Ω resistors 236, 238, and 244 and a 353 operational amplifier 242. The output of the summing circuit 240 is conveyed to the non-inverting input of the operational amplifier 246 and
10 represents the desired slope of the temperature change. The output of the operational amplifier 246 is provided to a transistor 248 contained within a power switching circuit 262.

The power switching circuit 262 includes a 5 VDC supply 250 providing current to the transistor 248. The transistor
15 248 has its emitter connected to a 3010 circuit 254 by way of resistor 252 which is preferably a 330 Ω resistor. The 3010 circuit 254 includes an output connected in series with a resistor 256 which preferably is a 180 Ω resistor. A triac 258 is preferably used to control the current delivered to a
20 lamp 262, or other heat producing device, from a source of AC current 260.

The temperature slope control circuit represented in Figure 10, in cooperation with the other described system components, provides thermal cycling of biological samples as great as 20°C/sec over a temperature range of 30°C, and most preferably over a temperature range of 40°C, with homogeneity being maintained throughout the biological sample.

It will be appreciated that the apparatus described herein can readily be used for many different applications including: polymerase chain reaction processes; cycle sequencing; and, other amplification protocols such as the ligase chain reaction. The present invention also advantageously provides an apparatus for accurately controlling the temperature of samples located in the sample chamber and quickly and accurately varies the temperature of samples located in a chamber according to a predetermined temperature versus time profile.

The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore,

indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

5 What is claimed and desired to be secured by United States Letters Patent is:

1. A method of subjecting at least a first biological sample to rapid thermal cycling, the method comprising the steps of:

5 (a) placing the first biological sample in at least a first container;

10 (b) raising the temperature of the first biological sample from a first temperature to a second temperature at a first rate at least as great as 1°C per second, the first temperature being at least 20°C different than the second temperature;

(c) holding the first biological sample at a temperature at least as great as the second temperature for not more than a first holding period, the first holding period being not greater than ten seconds;

15 (d) lowering the temperature of the first biological sample from the second temperature to at least the first temperature at a second rate at least as great as 1°C per second;

20 (e) holding the first biological sample at a temperature at least as low as the first temperature for

not more than a second holding period, the second holding period being not greater than ten seconds; and

(f) removing the first biological sample from the first container.

5 2. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the first temperature is at least 30°C different than the second temperature.

10 3. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the first temperature is at least 40°C different than the second temperature.

15 4. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the first rate is at least as great as 4°C per second.

5. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 4 wherein the second rate is at least as great as 4°C per second.

6. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the first rate is at least as great as 10°C per second.

7. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 6 wherein the second rate is at least as great as 10°C per second.

8. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the first holding period is not greater than 3 seconds.

9. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 8 wherein the second holding period is not greater than 3 seconds.

10. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the first holding period is not greater than 1 second.

11. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 10 wherein the second holding period is not greater than 1 second.

12. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein

the step of placing the first biological sample in at least a first container comprises the steps of:

placing a first portion of the biological sample into the first container;

5 placing a second portion of the biological sample into a second container;

placing a third portion of the biological sample into a third container; and

10 placing a fourth portion of the biological sample into a fourth container.

13. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 12 further comprising the step of positioning the first, second, third, and fourth containers in a sample chamber and wherein the step
15 of raising the temperature of the first biological sample comprises the step of subjecting the first, second, third, and fourth containers to infrared radiation.

14. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 further
20 comprising the step of repeating steps (b) through (e) at least fifteen times.

15. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 further comprising the step of repeating steps (b) through (e) at least thirty times in not more than 10 minutes.

5 16. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the step of placing the first biological sample in at least a first container comprises the step of placing the first biological sample in at least the first container having a
10 volume in the range from about 1 μl to about 10,000 μl .

 17. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 16 wherein the step of placing the first biological sample in at least a first container further comprises the step of placing the
15 first biological sample in at least the first container having an inner diameter in the range from about 0.02mm to about 1.0mm.

 18. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein
20 the step of raising the temperature of the first biological sample comprises the step of adjusting the first rate.

19. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the step of lowering the temperature of the first biological sample comprises the step of adjusting the second rate.

5 20. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the step of holding the biological sample at a temperature comprises the step of adjusting the length of the first holding period.

10 21. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the step of lowering the temperature of the first biological sample comprises the step of moving ambient air past the first container at a rate at least as great as 500 meters per
15 minute.

22. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 1 wherein the first biological sample comprises DNA and primers.

23. A method of subjecting at least a first biological sample to rapid thermal cycling, the method comprising the steps of:

5 (a) placing the first biological sample in at least a first container, the first container having a volume in the range from about 1 μl to about 10,000 μl ;

10 (b) raising the temperature of the first biological sample from a first temperature to a second temperature at a first rate at least as great as 10°C per second, the first temperature being at least 30°C different than the second temperature, the temperature of the first biological sample being homogeneously raised such that no portion of the first biological sample is more than about 5°C warmer or cooler than any other portion of the first biological sample;

15 (c) holding the first biological sample at a temperature at least as great as the second temperature for not more than a first holding period, the first holding period being not greater than three seconds;

20 (d) lowering the temperature of the first biological sample from the second temperature to at least

the first temperature at a second rate at least as great
as 10°C per second;

(e) holding the first biological sample at a
temperature at least as low as the first temperature for
not more than a second holding period, the second holding
period being not greater than three seconds;

(f) removing the first biological sample from the
first container; and

(g) repeating steps (b) through (e) at least
fifteen times.

24. A method of subjecting at least a first biological
sample to rapid thermal cycling as defined in claim 23 further
comprising the step of repeating steps (b) through (e) a
plurality of times and wherein the step of raising the
temperature of the first biological sample comprises the step
of holding the temperature of the first biological sample at
a third temperature for not more than 10 seconds, the third
temperature being intermediate the first temperature and the
second temperature.

25. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 23 wherein the step of placing the first biological sample in at least a first container comprises the steps of:

5 placing a first portion of the biological sample into the first container;

 placing a second portion of the biological sample into a second container;

 placing a third portion of the biological sample
10 into a third container; and

 placing a fourth portion of the biological sample into a fourth container;

and wherein the method further comprises the step of positioning the first, second, third, and fourth containers in
15 a sample chamber and wherein the step of raising the temperature of the first biological sample comprises the step of subjecting the first, second, third, and fourth containers to infrared radiation.

26. A method of subjecting at least a first biological
20 sample to rapid thermal cycling as defined in claim 23 wherein

the step of raising the temperature of the first biological sample comprises the step of adjusting the first rate.

27. A method of subjecting at least a first biological sample to rapid thermal cycling as defined in claim 23 wherein
5 the step of lowering the temperature of the first biological sample comprises the step of moving ambient air past the first container at a rate at least as great as 500 meters per minute.

28. A method of subjecting at least a first biological
10 sample to rapid thermal cycling as defined in claim 23 wherein the first biological sample comprises DNA and primers.

29. A method of subjecting at least a first biological sample containing a DNA template, an oligonucleotide primer, and a reaction buffer to perform cyclic DNA amplification
15 using a thermostable DNA polymerase, the method comprising the steps of:

(a) placing the first biological sample in a plurality of containers, each container having a volume in the range from about 1 μl to about 10,000 μl ;

20 (b) raising the temperature of the first biological sample placed in each of the plurality of containers from

a first temperature to a second temperature at a first rate at least as great as 10°C per second, each of the plurality of containers being subjected to infrared radiation, the first temperature being at least 30°C different than the second temperature, the temperature of the first biological sample being homogeneously raising such that no portion of the first biological sample is more than about 5°C warmer or cooler than any other portion of the first biological sample found in the same or any of the other of the plurality of containers;

(c) holding the first biological sample at a temperature at least as great as the second temperature for not more than a first holding period, the first holding period being not greater than one second;

(d) lowering the temperature of the first biological sample from the second temperature to at least the first temperature at a second rate at least as great as 10°C per second by moving air past the first container at a rate at least as great as 250 meters per minute;

(e) holding the first biological sample at a temperature at least as low as the first temperature for

not more than a second holding period, the second holding period being not greater than one second;




(f) removing the first biological sample from substantially all of the plurality of containers; and

5 (g) repeating steps (b) through (e) at least fifteen times.

ABSTRACT OF THE DISCLOSURE

A thermal cycling method and device is disclosed. The device comprises a sample chamber whose temperature can be rapidly and accurately modulated over a range of temperatures needed to carry out a number of biological procedures, such as the DNA polymerase chain reaction. Biological samples are placed in glass micro capillary tubes and then located inside the sample chamber. A programmable controller regulates the temperature of the sample inside the sample chamber. Once a heating cycle is completed, the controller opens a door to the chamber for venting hot air out and cool ambient air is moved in. Temperature versus time profiles corresponding to optimum denaturation, annealing and elongation temperatures for amplification of DNA are achieved by the present invention.

15 a:\8616cip3.pat

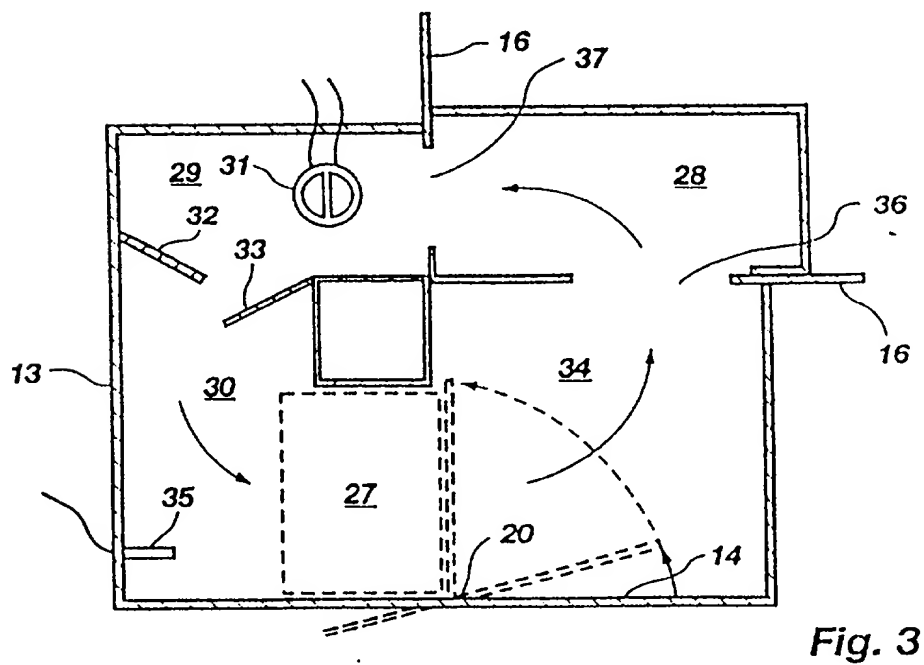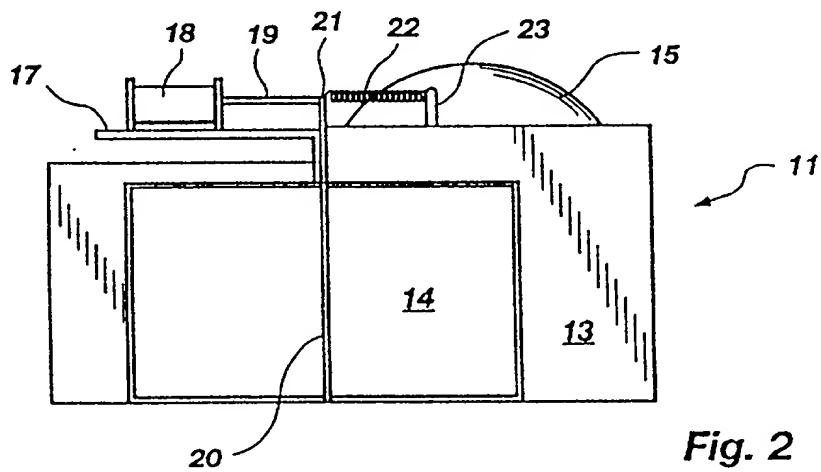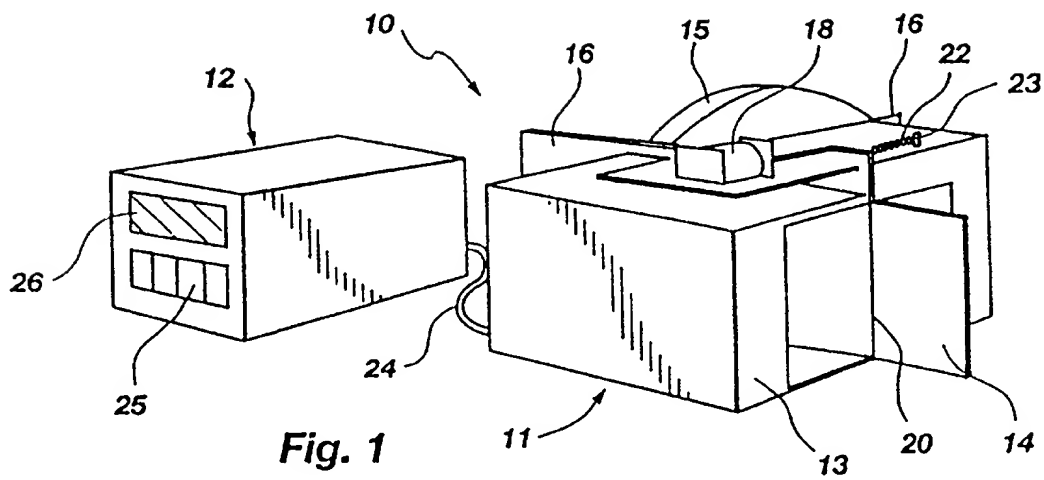

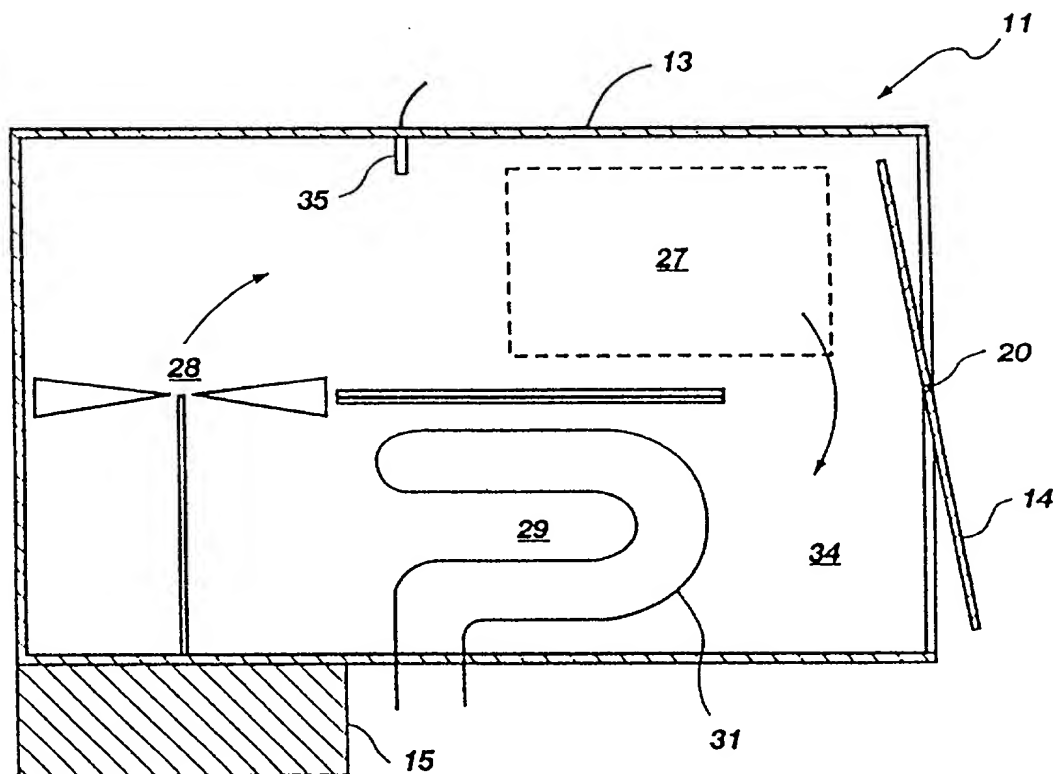


Fig. 4

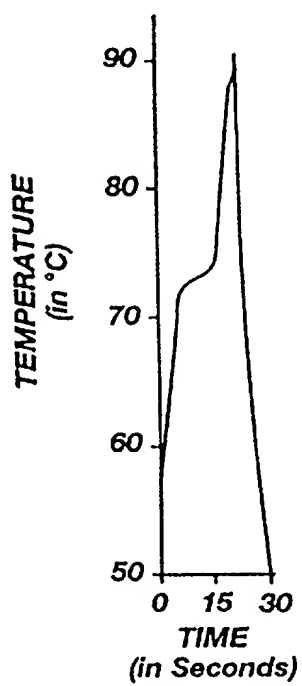


Fig. 5

Effect of Annealing Time on Product Yield and Background Amplification

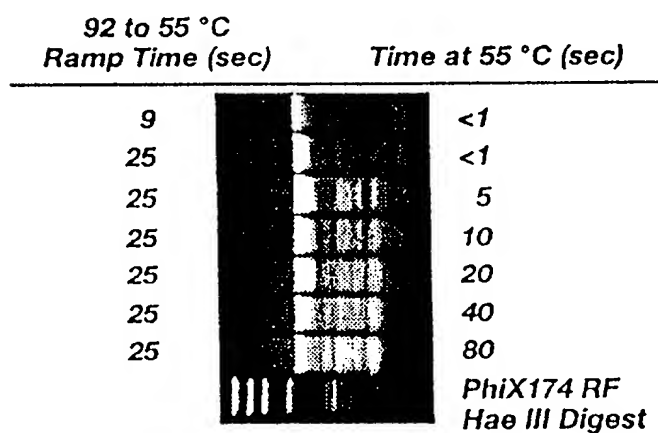


Fig. 7

Effect of Denaturation Time on Product Yield

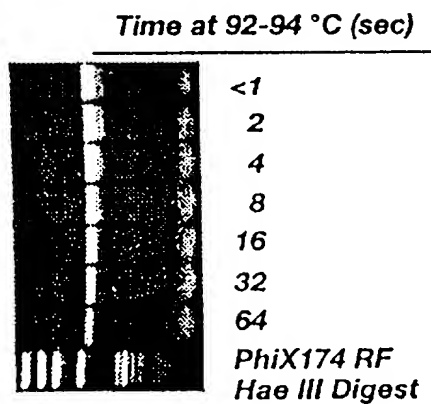
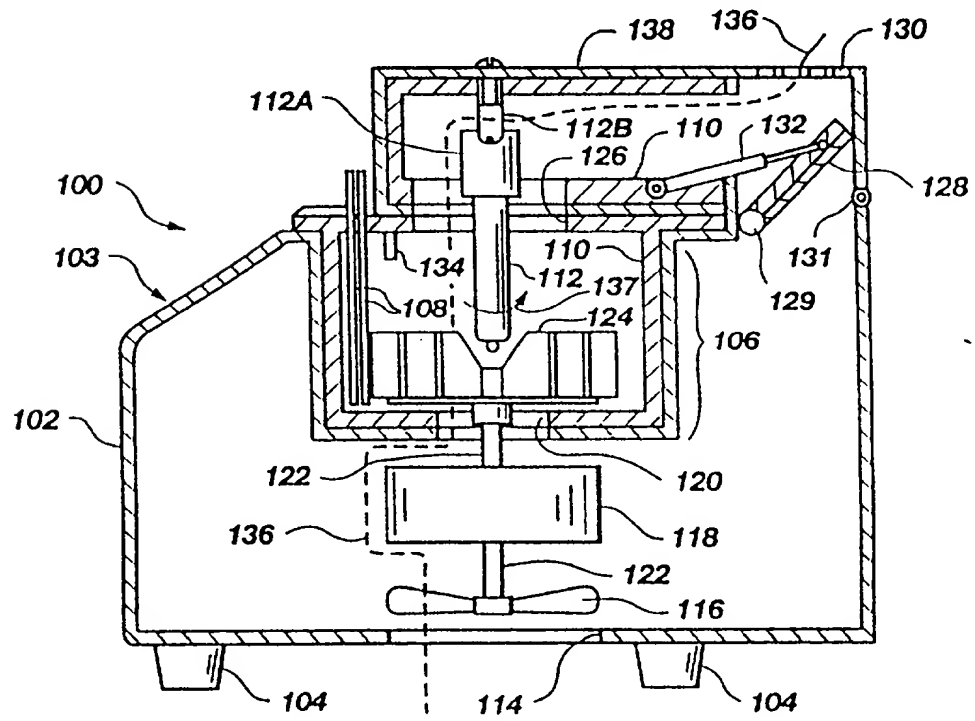
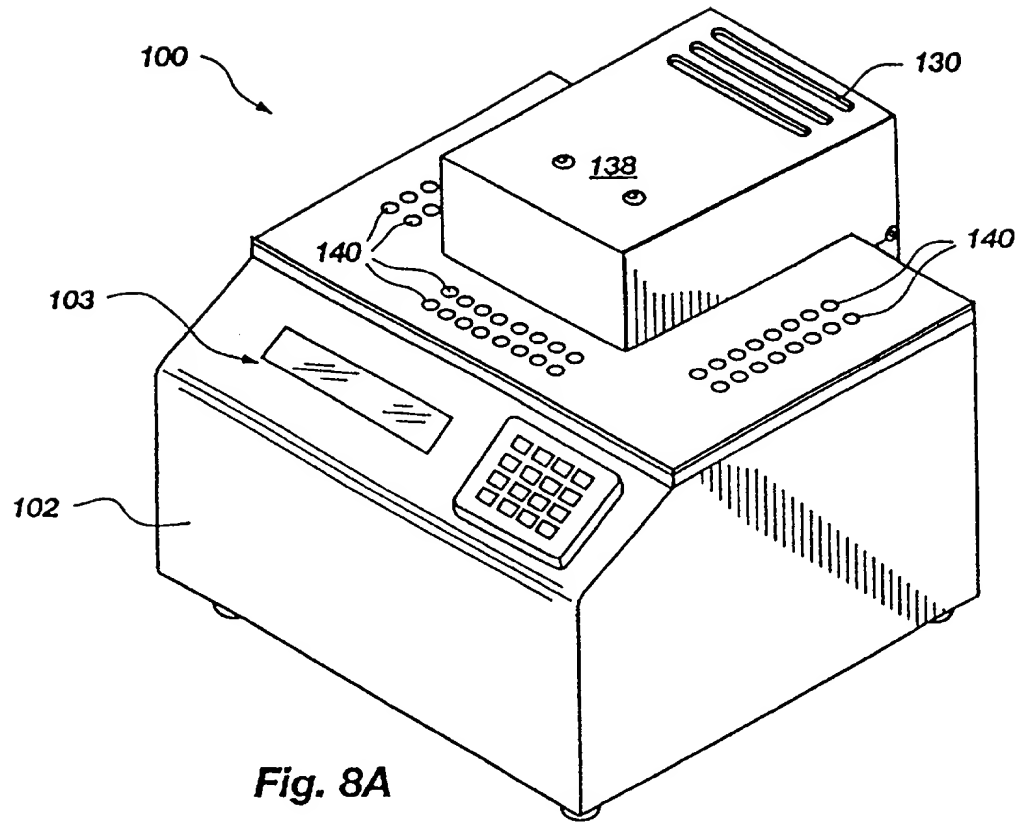


Fig. 6



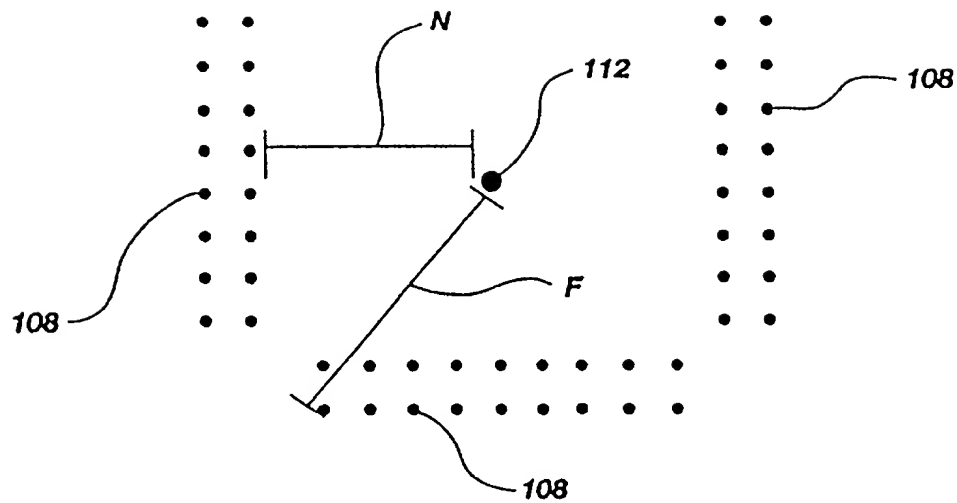


Fig. 8C

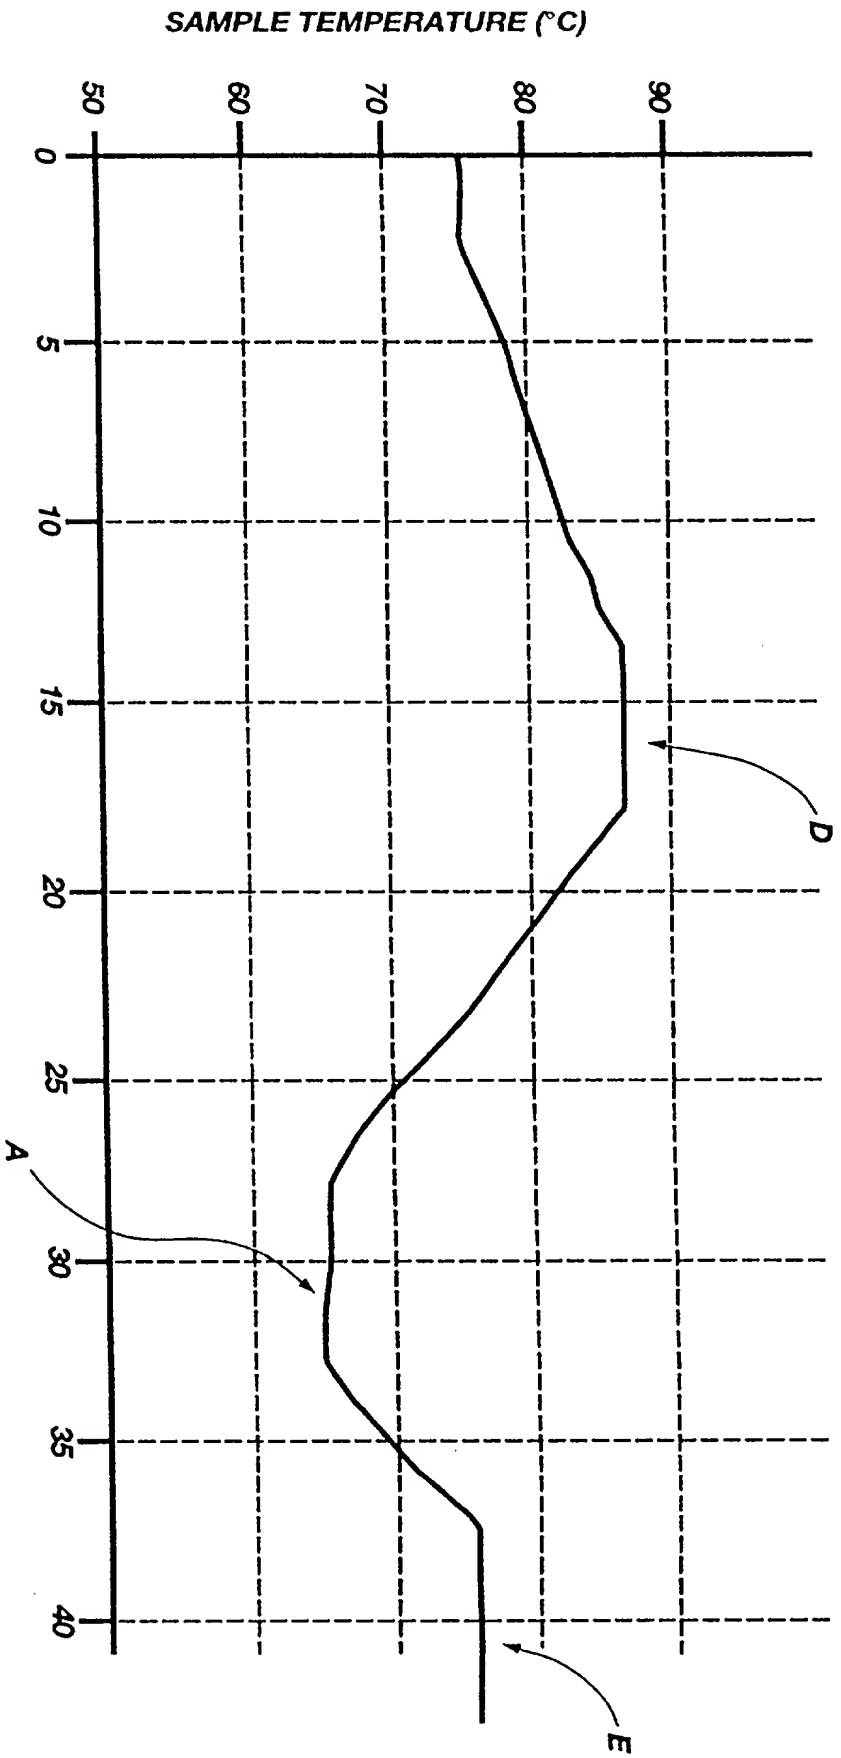


Fig. 9C

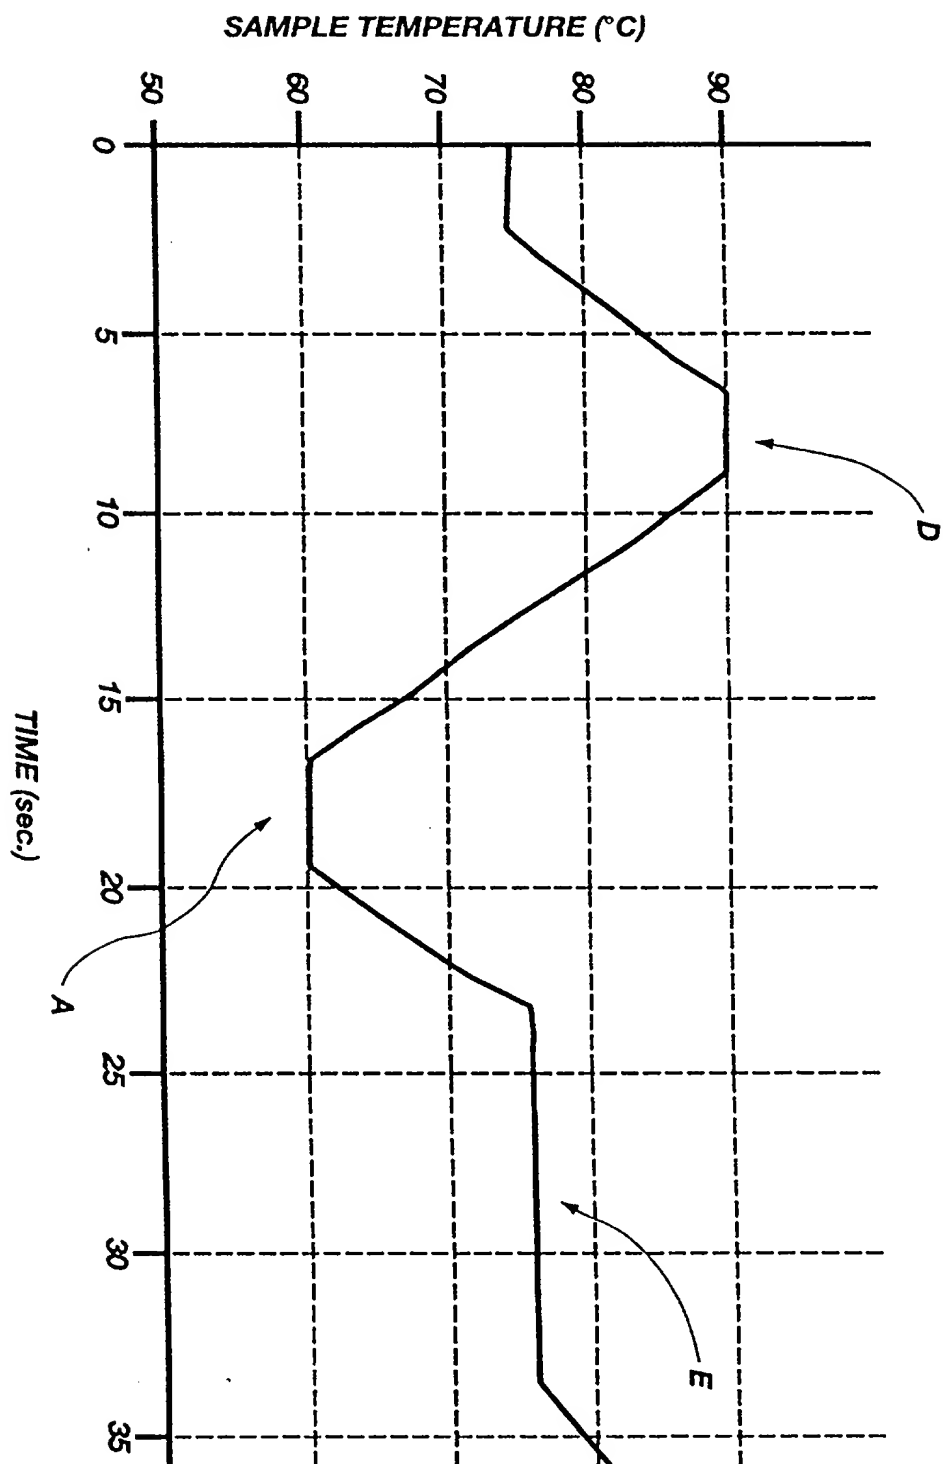


Fig. 9D

THE **NEW** **YORK** **PUBLIC** **LIBRARY**

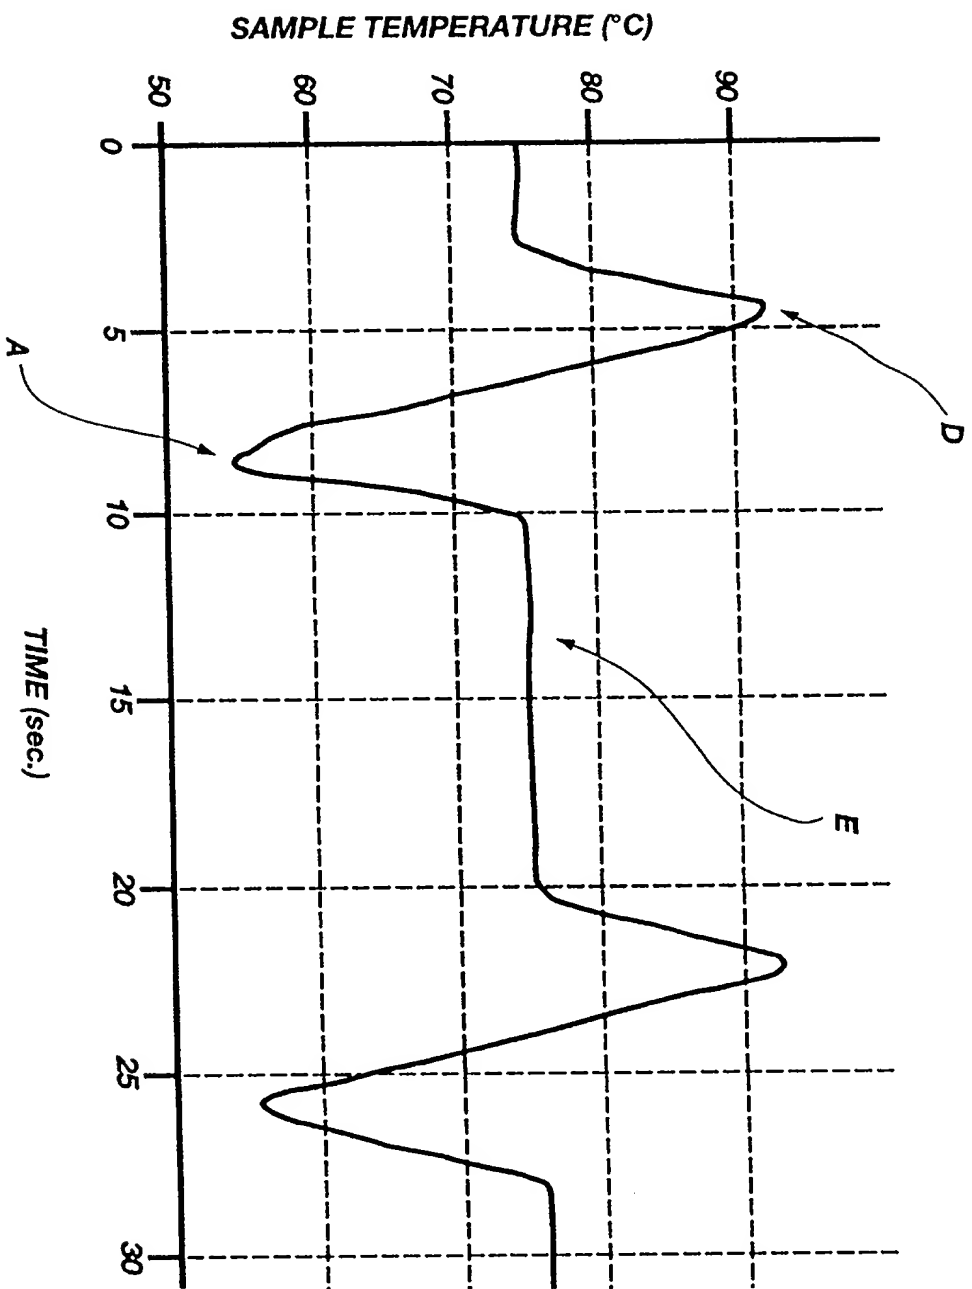


Fig. 9F

00132156 . 001403

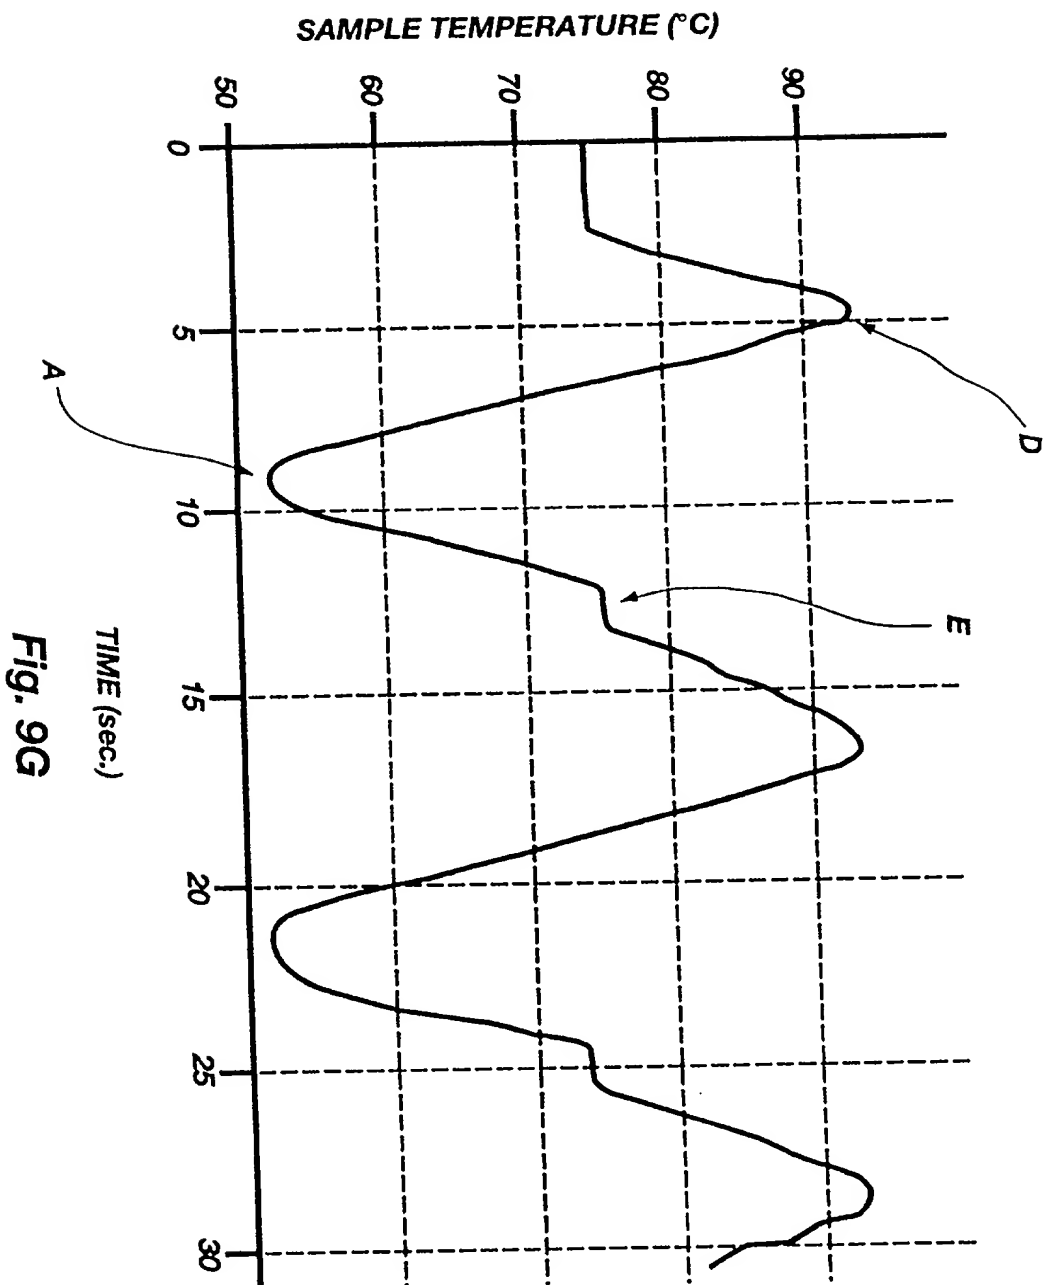


Fig. 9G

00432155-004403

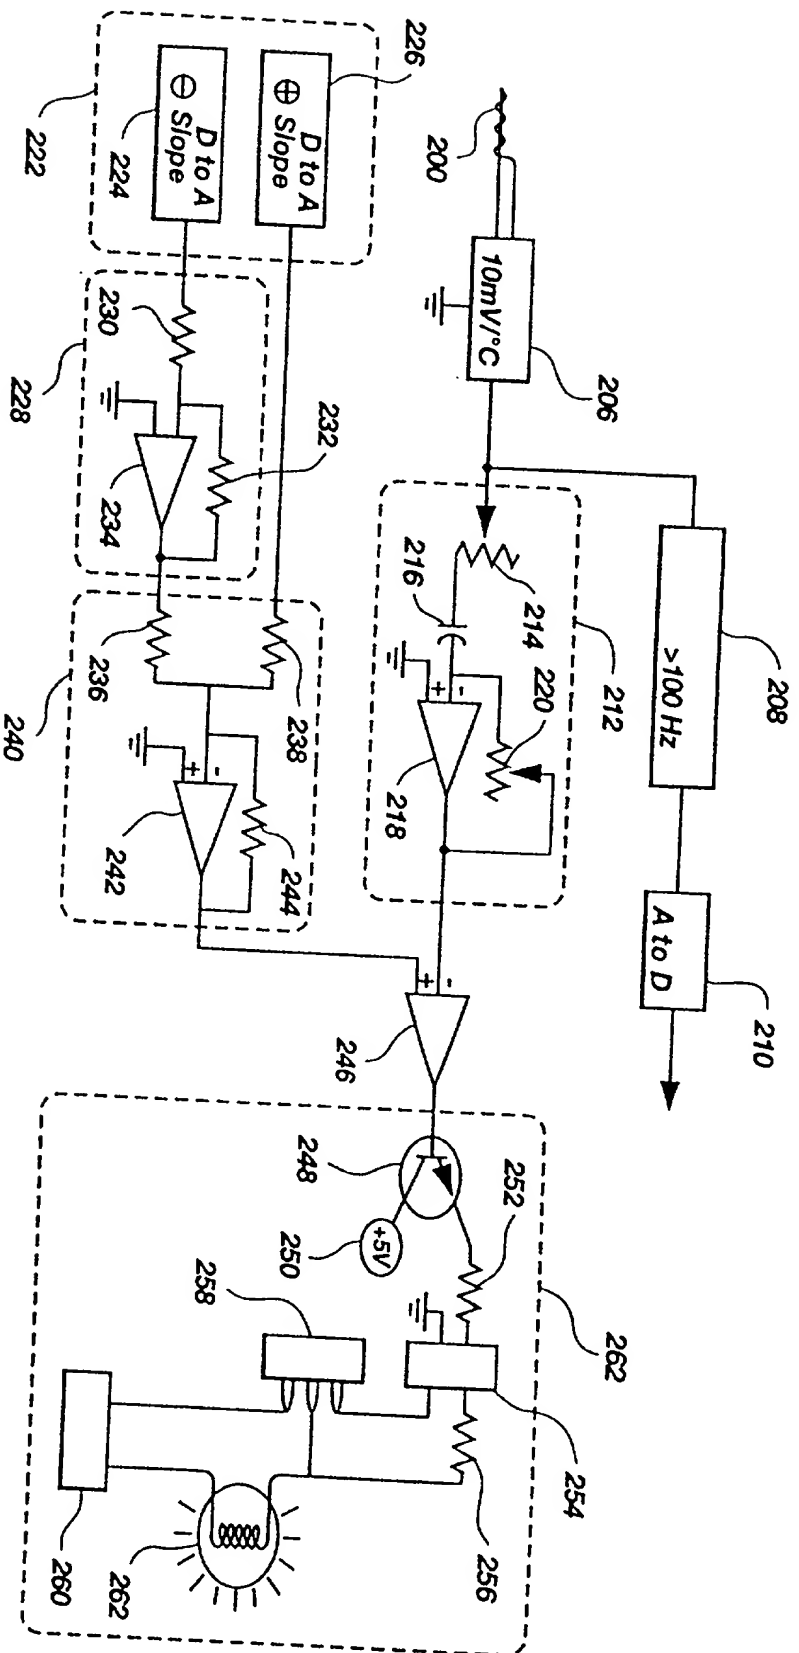


Fig. 10

DECLARATION, POWER OF ATTORNEY, AND PETITION

We, Carl T. Wittwer and David R. Hillyard, declare: that we are citizens of the United States of America; that our residence and post office addresses are shown below adjacent to our names; that we verily believe we are the original, first, and sole inventors of the subject matter of the invention entitled **METHOD FOR RAPID THERMAL CYCLING OF BIOLOGICAL SAMPLES**, for which a patent is sought and which is described and claimed in the specification filed in the United States Patent and Trademark Office on October 2, 1995 as Serial No. 08/537,612. (We hereby authorize the attorneys of Thorpe, North & Western to insert said serial number when known); that we have reviewed and understand the contents of the above-identified specification, including the claims; and that we acknowledge the duty to disclose information which is material to the examination of this application in accordance with Section 1.56(a) of Title 37 of the Code of Federal Regulations.

We hereby claim the benefit under Section 120 of Title 35 of the United States Code of the earlier filed U.S. patent application serial no. 08/179,969 filed January 10, 1994 entitled Rapid Thermal Cycling Device, U.S. Patent No. 5,455,175 issued on October 3, 1995 which is a continuation-in-part of U.S. patent application 07/815,966 filed January 1, 1992 entitled Rapid Thermal Cycling Device which is a continuation-in-part of U.S. Patent application serial no. 07/534,029 filed June 4, 1990 entitled Automated Polymerase Chain Reaction Device; and, insofar as the subject

matter of each of the claims of these applications are not disclosed in the earlier filed pending applications in the manner provided by the first paragraph of Section 112 of Title 35 of the United States code, we acknowledge the duty to disclose material information, as defined in Section 1.56(a) of Title 37 of the Code of Federal Regulations, which occurred between the filing date of the earlier filed applications and the filing date of this application.

We declare further that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful, false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful, false statements may jeopardize the validity of the application or any patent issuing thereon.

We hereby appoint as our attorneys CALVIN E. THORPE, Registration No. 24928, VAUGHN W. NORTH, Registration No. 27930, M. WAYNE WESTERN, Registration No. 22788, GRANT R. CLAYTON, Registration No. 32462, ALAN J. HOWARTH, Registration No. 36,553, KARL R. CANNON, Registration No. 36,468, V. ROLAND SMITH, Registration No. 37,727, SALLY J. BROWN, Registration No. 37,788, and DAVID O'BRYANT, Registration No. 39,793, all of the law firm of THORPE, NORTH & WESTERN located at 9035 South 700 East, Suite 200, Sandy, Utah 84070, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

All correspondence and telephonic communications should be directed to:

Grant R. Clayton
THORPE, NORTH & WESTERN
9035 South 700 East, Suite 200
Sandy, Utah 84070
Telephone: 801/566-6633
Facsimile: 801/566-0750
Attorney Docket No. 8616.CIP3

Wherefore, we pray that Letters Patent be granted to us for the invention or discovery described and claimed in the specification and claims, declaration, power of attorney, and this petition.

Signed at Salt Lake City, Utah, this 18th day of October, 1995.

Inventor Carl T. Wittwer
Carl T. Wittwer
2568 East 1700 South
Salt Lake City, Utah 84108

Inventor David R. Hillyard
David R. Hillyard
~~3545 Ceres~~ 3685 Juno Dr.
Salt Lake City, Utah 84124